





Host Interface	Three SAS 12Gbps 4x wide port
Hard Drive	12x 3.5" SAS/SATA 12/6Gb/s, SAS/SATA 3Gb/s hard drive or 2.5" SAS/SATA SSD
LED Indicators	Front panel: Status, fault, system over heat, fan error Rear panel: SAS link, SAS error, enclosure ID
Form Factor	2U rackmount
Dimensions (DxWxH) mm	88 (H) x 439 (W) x 520(D) mm 3.46 (H) x 17.28 (W)x 20.47 (D) inch
Weight	Net weight (NAS only): 14.8 kg/ 32.63 lb Gross weight (with packing and accessories):21.99 kg/ 48.48 lb
Sound Level*	Sound pressure (LpAm): 46.1 dB(A)
Temperature	0-40°C
Humidity	5~95% RH non-condensing, wet bulb: 27°C
Power Consumption: In Operation	162.47W
Power Supply	Redundant/ Hot Swap ATX Power Supply, 400W, 90-264Vac~, 47-63Hz
Fan	3 x 6 cm smart cooling fan (hot-swappable fan module)

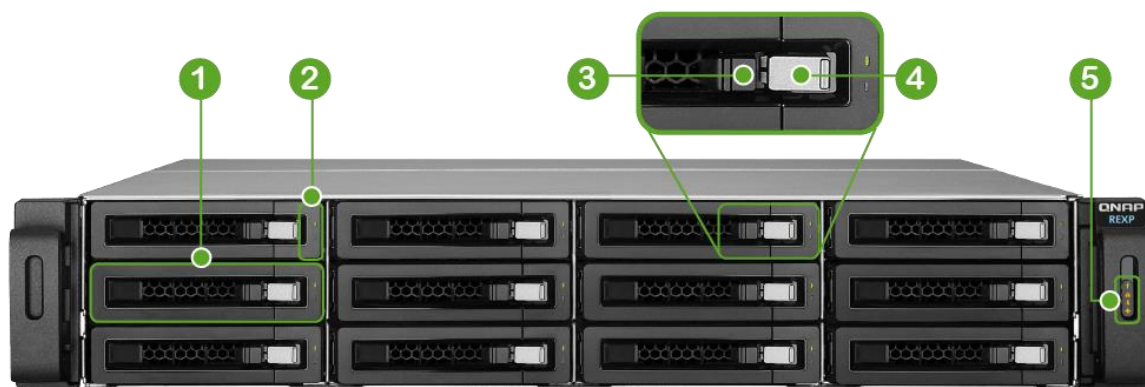

1.	Hard Drive Tray
2.	Hard Drive LEDs
3.	Tray Lock
4.	Release Button
5.	LED Indicators: System status, system fault, system over heat, fan error

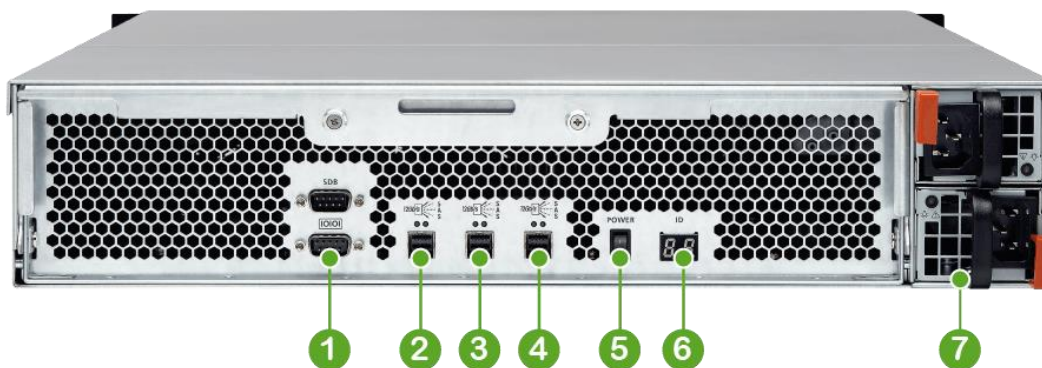

1.	COM Port (Reserved)
2.	Mini SAS Port (8644)
3.	Mini SAS Port (8644)
4.	Mini SAS Port (8644)
5.	Power Switch
6.	Enclosure ID
7.	Power Connection

- A. Mounting post width: $\geq 450\text{mm}$
- B. Panel width: $\geq 500\text{mm}$
- C. Mounting post depth: 650mm-850mm

