

کاتالوگ محصول

HPE DL380 GEN12



فالنیک (ایران اچ پی)

Falnic.com

سرورهای HP به عنوان یکی از قابل اعتمادترین و پرکاربردترین پلتفرم های سروری در جهان، به دلیل عملکرد پایدار، امنیت بالا، قابلیت ارتقا و ابزارهای مدیریتی قدرتمند، انتخاب بسیاری از شرکت ها، سازمان ها و دیتاسنترها هستند.

آشنایی با مشخصات فنی، قابلیت ها و کاربرد هر مدل از سرورهای HP می تواند به شما کمک کند تا متناسب با نیاز کسب و کار خود، بهترین گزینه را انتخاب کنید.

در این کاتالوگ تلاش کرده ایم اطلاعاتی کاربردی از مشخصات فنی، قابلیت ها و ویژگی های مهم این محصول را در اختیار شما قرار دهیم تا بتوانید با دیدی دقیق تر تصمیم گیری کنید. اگر برای انتخاب، ارتقا یا پیاده سازی سرور مناسب به راهنمایی تخصصی نیاز دارید، کارشناسان فالنیک آماده اند تا بر اساس نیاز کسب و کار شما بهترین راهکار را پیشنهاد دهند. برای دریافت مشاوره رایگان کفایست با شماره [0218363](tel:0218363) تماس بگیرید.

خدمات فالنیک تنها به ارائه تجهیزات محدود نمی شود. ما با ارائه مجموعه ای کامل از خدمات شامل مشاوره تخصصی قبل از خرید، تأمین تجهیزات اصلی، نصب و راه اندازی، پیکربندی سرور، ارتقا زیرساخت و پشتیبانی و تیم متخصص شبکه، تلاش می کنیم تا سازمان ها بتوانند زیرساختی پایدار، امن و مقیاس پذیر برای رشد کسب و کار خود ایجاد کنند.

شرکت فالنیک (ایران اچ پی) فعالیت خود را از سال ۱۳۷۴ با نام ایران HP آغاز کرد و امروز به عنوان با سابقه ترین و معتبرترین مرجع تخصصی [سرور hp](http://hp.com) و تجهیزات شبکه و خدمات IT در ایران شناخته می شود. ما با بیش از ۳۰ سال تجربه و ارائه ی سبکی شامل بیش از ۱۰۰۰ محصول و خدمت، با رویکرد Total Solution صفر تا صد تجهیزات، خدمات و زیرساخت IT را با گارانتی معتبر و خدمات پس از فروش ارائه می کنیم تا شبکه ای امن، پرسرعت و پایدار را تجربه کنید.

شرکت فالنیک در طول فعالیت خود، موفق به همکاری با بیش از ۳۴ هزار مشتری حقیقی و ۹ هزار سازمان و شرکت شده است.




021-8363

خرید سرور 12g 380dl

فالنیک

(ایران اچ پی)

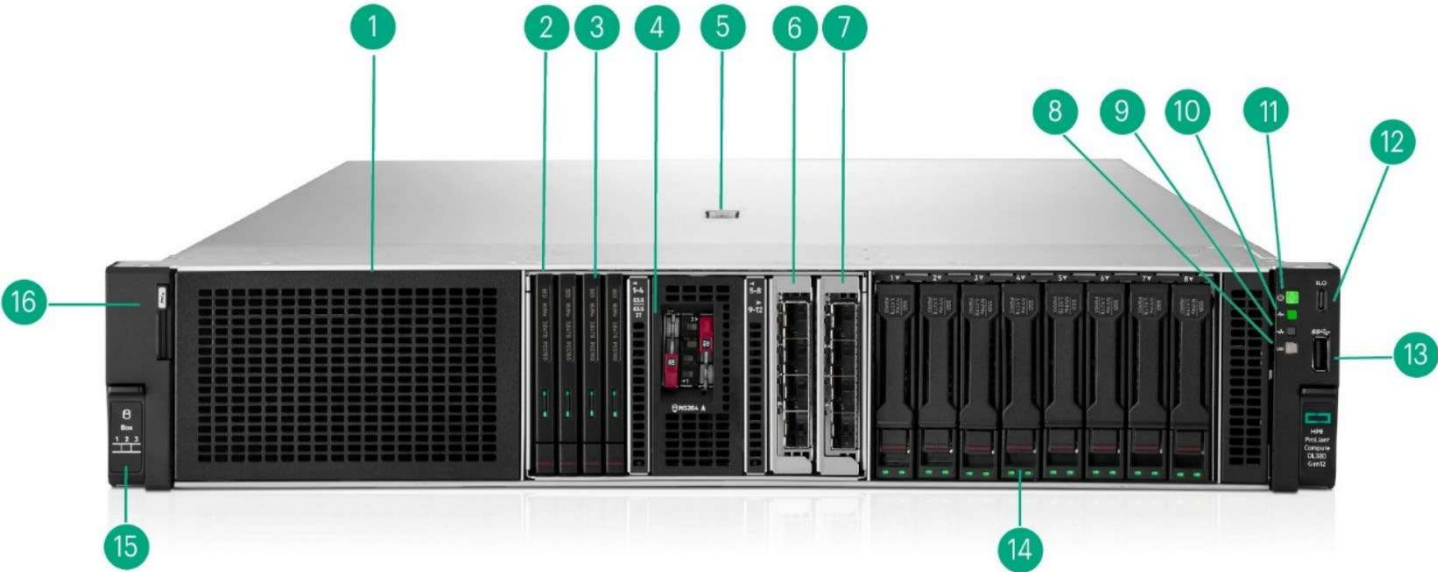


Front View –SFF CTO Server with optional multipurpose cage

Item	Description	Item	Description
1.	Box 1 for 8SFF drives or Optional Universal Media Bay (ODD, DisplayPort and 2 USB 3.2 Gen 1 Ports) with 2SFF drives, shown empty	9.	NIC status ¹
2.	Box 2 for 8SFF drives or optional multipurpose cage (shown)	10.	Health LED
3.	Optional 4 EDSFF drives (shown in multipurpose cage in Box 2)	11.	Power on / standby button / LED
4.	Optional front NS204i-u (shown in multipurpose cage in Box2)	12.	USB-C iLO service port
5.	Quick-removal access panel	13.	USB 3.2 Gen 1 Port
6.	Optional front Primary OCP Slot (shown in multipurpose cage in Box 2)	14.	Box 3 for 8SFF drives (shown)
7.	Optional front Secondary OCP Slot (shown in multipurpose cage in Box 2)	15.	Drive support label
8.	Unit identification button / LED	16.	Serial number label pull tab


Notes:

- ¹Front NIC LED display doesn’t support NIC LED ACT/LINK indication from PCIe NICs.
- Default SFF CTO Server 8 SFF drive cage installation sequence is Box 3, Box 2, then Box 1.

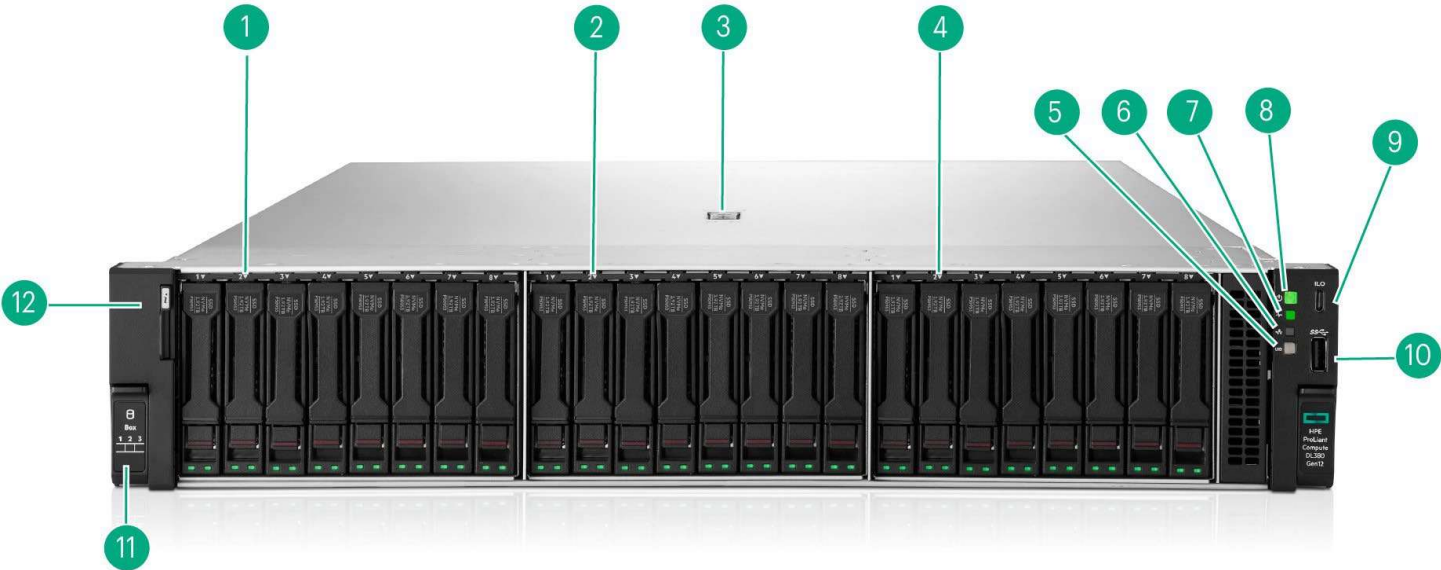


Front View – 24 SFF CTO Server

Item	Description	Item	Description
1.	Box 1 for 8 SFF drives (shown)	7.	Health LED
2.	Box 2 for 8 SFF drives (shown)	8.	Power on / standby button / LED
3.	Quick-removal access panel	9.	USB-C iLO service port
4.	Box 3 for 8 SFF drives (shown)	10.	USB 3.2 Gen 1 port
5.	Unit identification button / LED	11.	Drive support label
6.	NIC status	12.	Serial number label pull tab

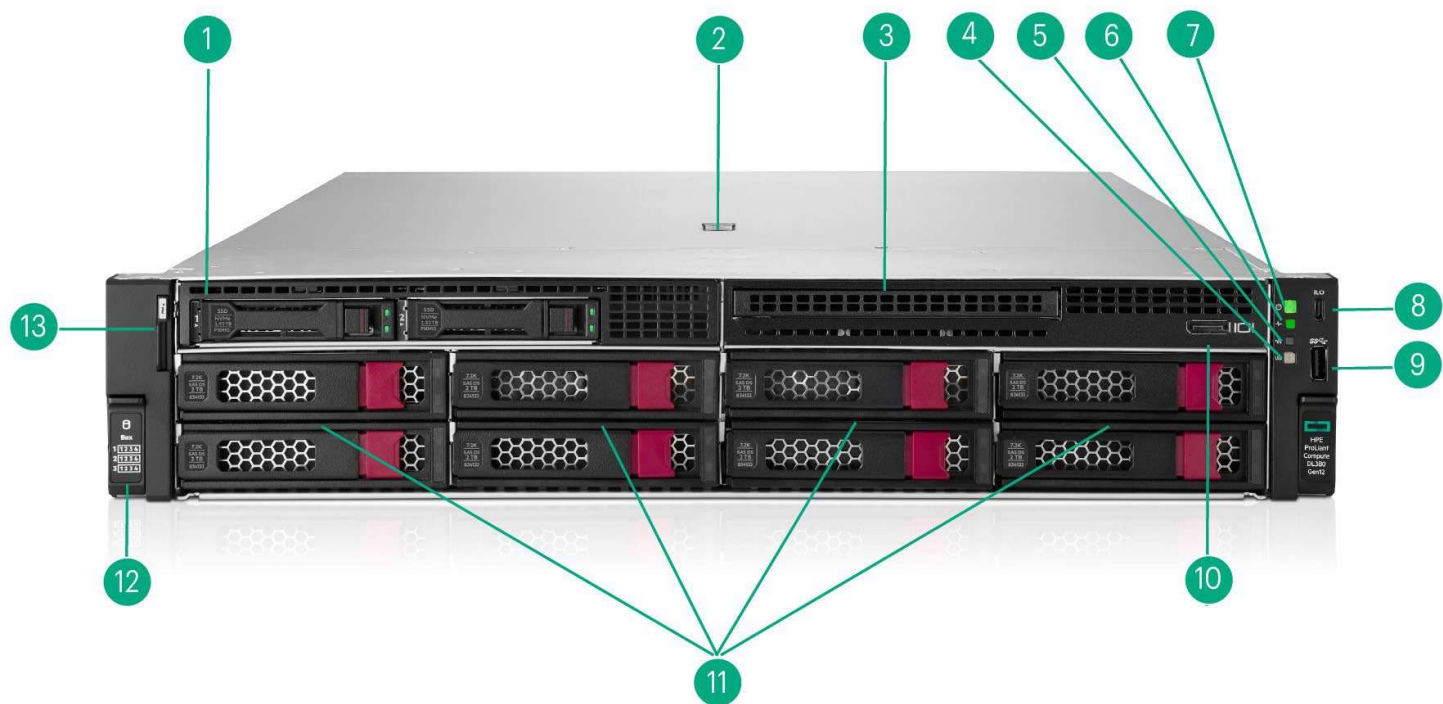


Front View – 8 LFF CTO Server with optional 2SFF and Universal Media Bay

Item	Description	Item	Description
1.	Optional 2 SFF drives in Box 1	8.	USB-C iLO service port
2.	Quick-removal access panel	9.	USB 3.2 Gen1 port
3.	Optional ODD Kit in Box 1 (shown without the ODD)	10.	Optional DisplayPort via ODD Kit in Box 1 (shown)
4.	NIC status	11.	Box 2 and 3 for 4 LFF drives in each box (shown)
5.	Power on / standby button / LED	12.	Drive support label
6.	Health LED	13.	Serial number label pull tab
7.	Power on / standby button / LED		

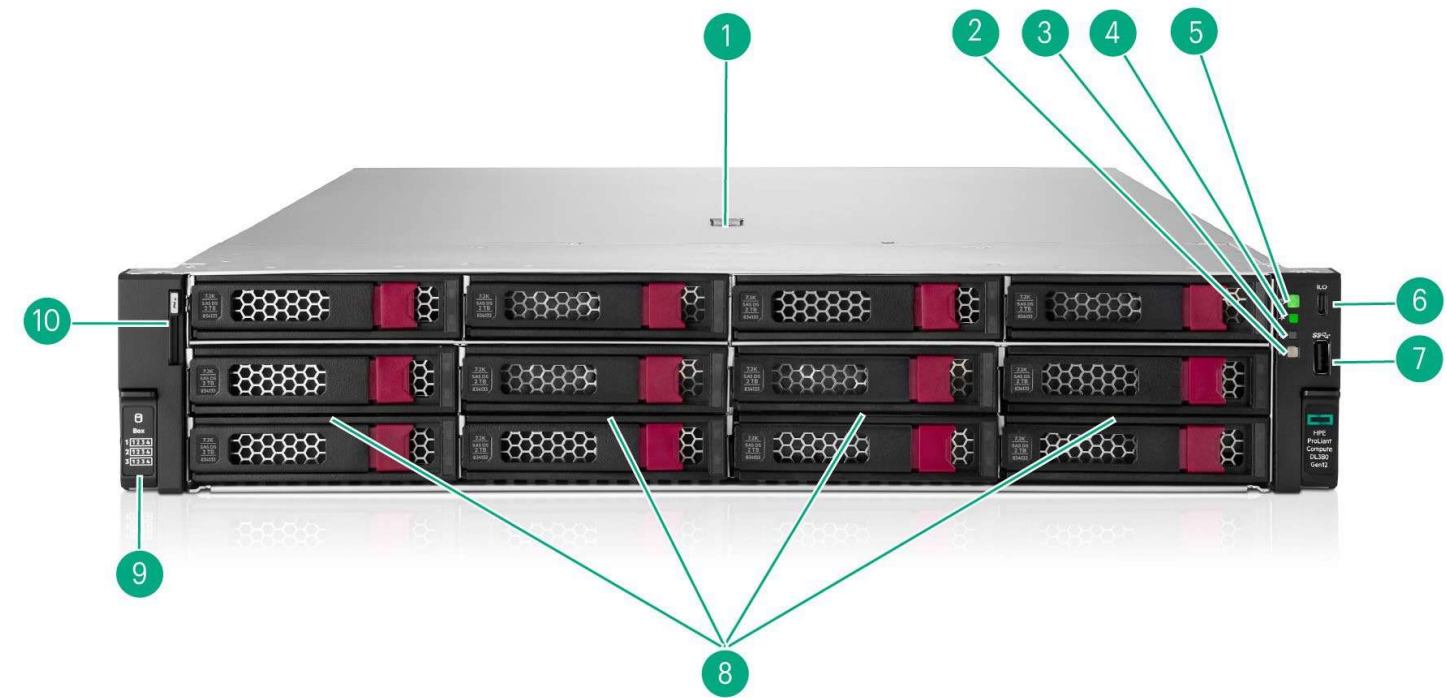

Front View – 12 LFF CTO Server


Item	Description	Item	Description
1.	Quick-removal access panel	6.	USB-C iLO service port
2.	Unit identification button / LED	7.	USB 3.2 Gen1 port
3.	NIC status	8.	Box 1, 2 and 3 for 4 LFF drives in each box (shown)
4.	Health LED	9.	Drive support label
5.	Power on / standby button / LED	10.	Serial number label pull tab

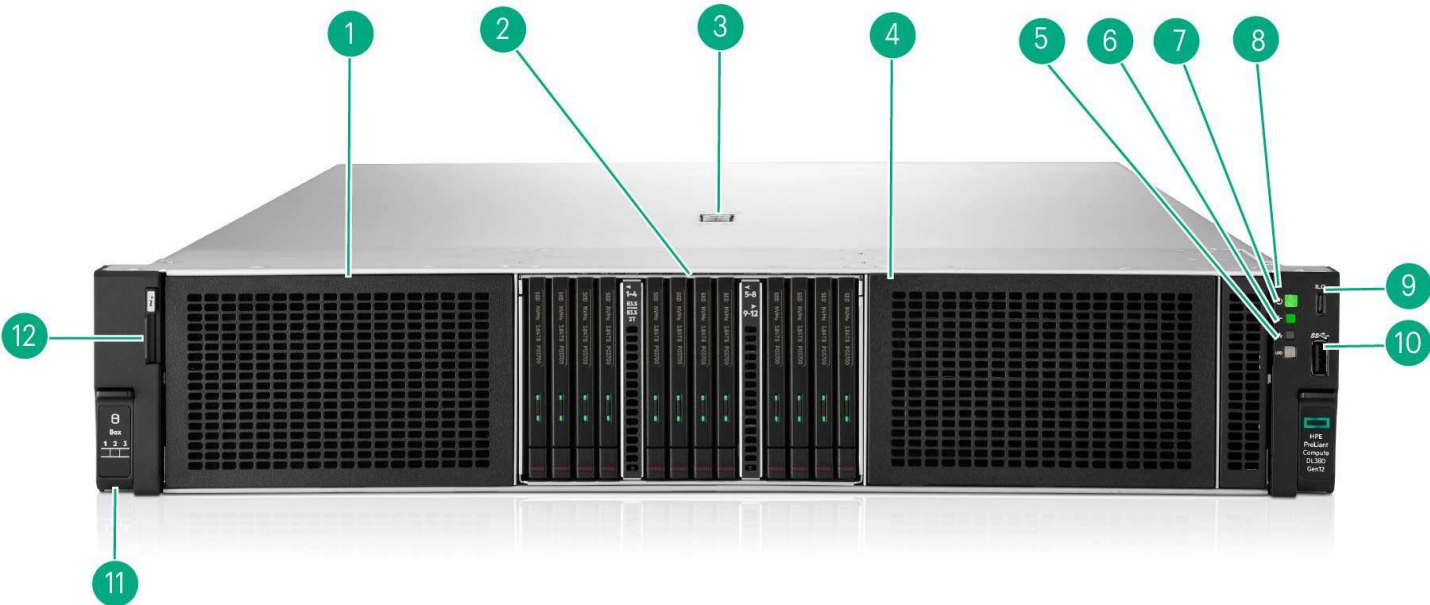

Front View – EDSFF CTO Server


Item	Description	Item	Description
1.	Box 1 for 12 EDSFF drives or 8SFF drive (shown empty)	7.	Health LED
2.	Box 2 for 12 EDSFF drives (shown) or multipurpose cage	8.	Power on / standby button / LED
3.	Quick-removal access panel	9.	USB-C iLO service port
4.	Box3 for 12 EDSFF drives or 8SFF drives (shown empty)	10.	USB 3.2 Gen 1 port
5.	Unit identification button / LED	11.	Drive support label
6.	NIC status	12.	Serial number label pull tab

Notes: Default EDSFF CTO Server drive cage installation sequence is Box 2, Box 3, then Box 1.

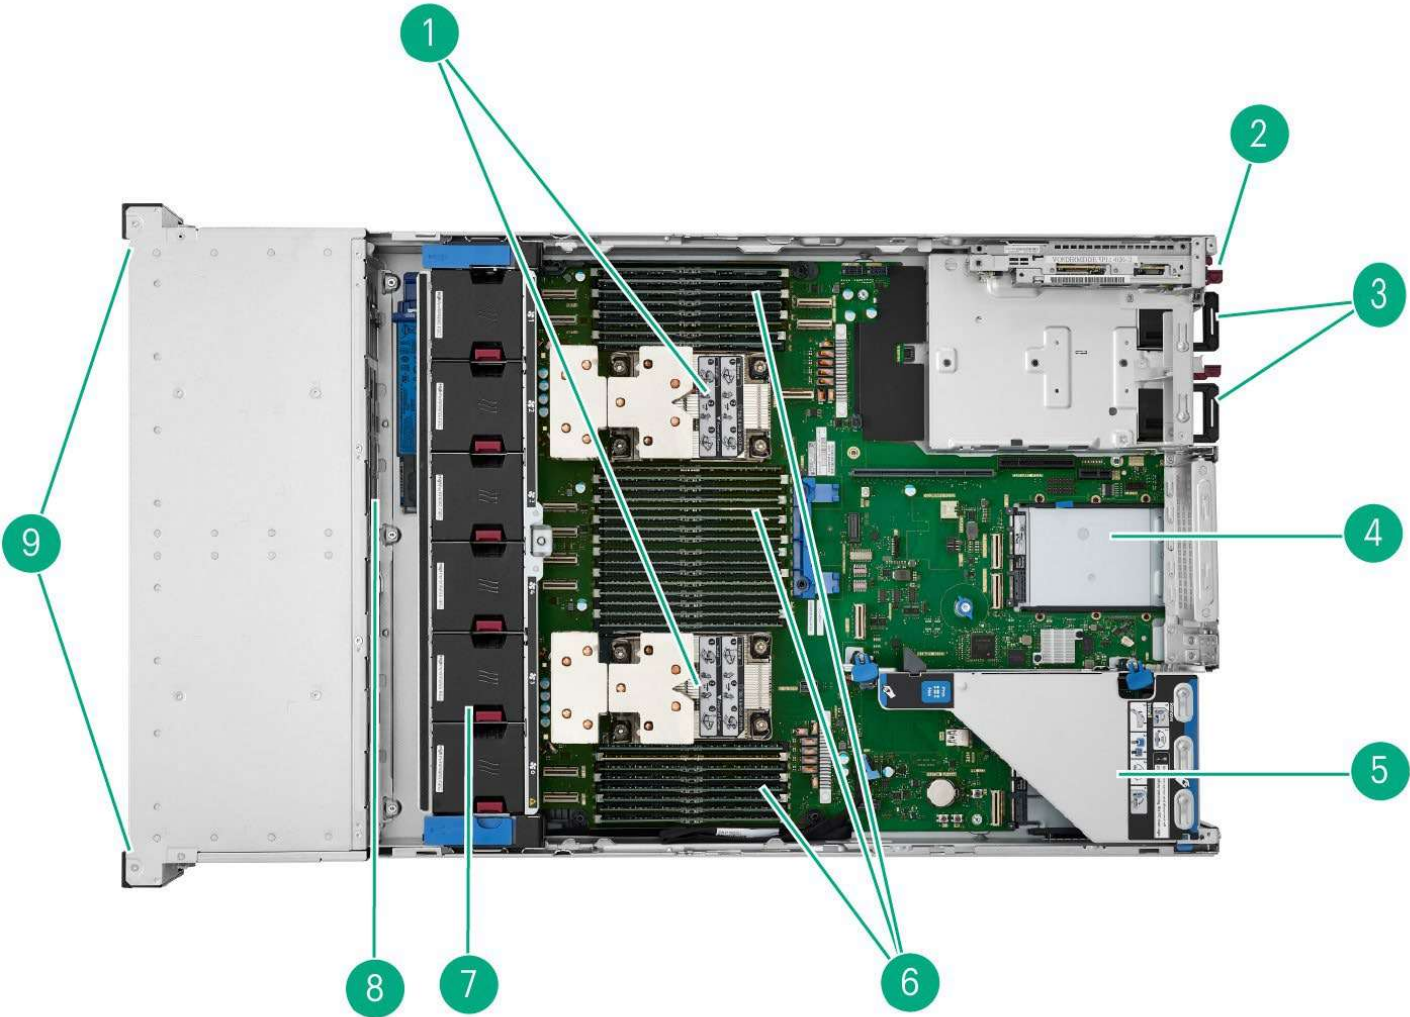


Internal View SFF chassis- Air Cooled

Item	Description	Item	Description
1.	Processors, heatsinks (shown)	6.	DIMM slots, shown fully populated in 32 slots
2.	Optional NS204i-u Boot Device	7.	Hot Plug Fans
3.	Hot Plug redundant HPE Flexible Slot Power Supplies	8.	Drive Backplanes
4.	Secondary Riser (Optional-not shown, Requires second processor)	9.	Drive Cages
5.	Primary Riser		

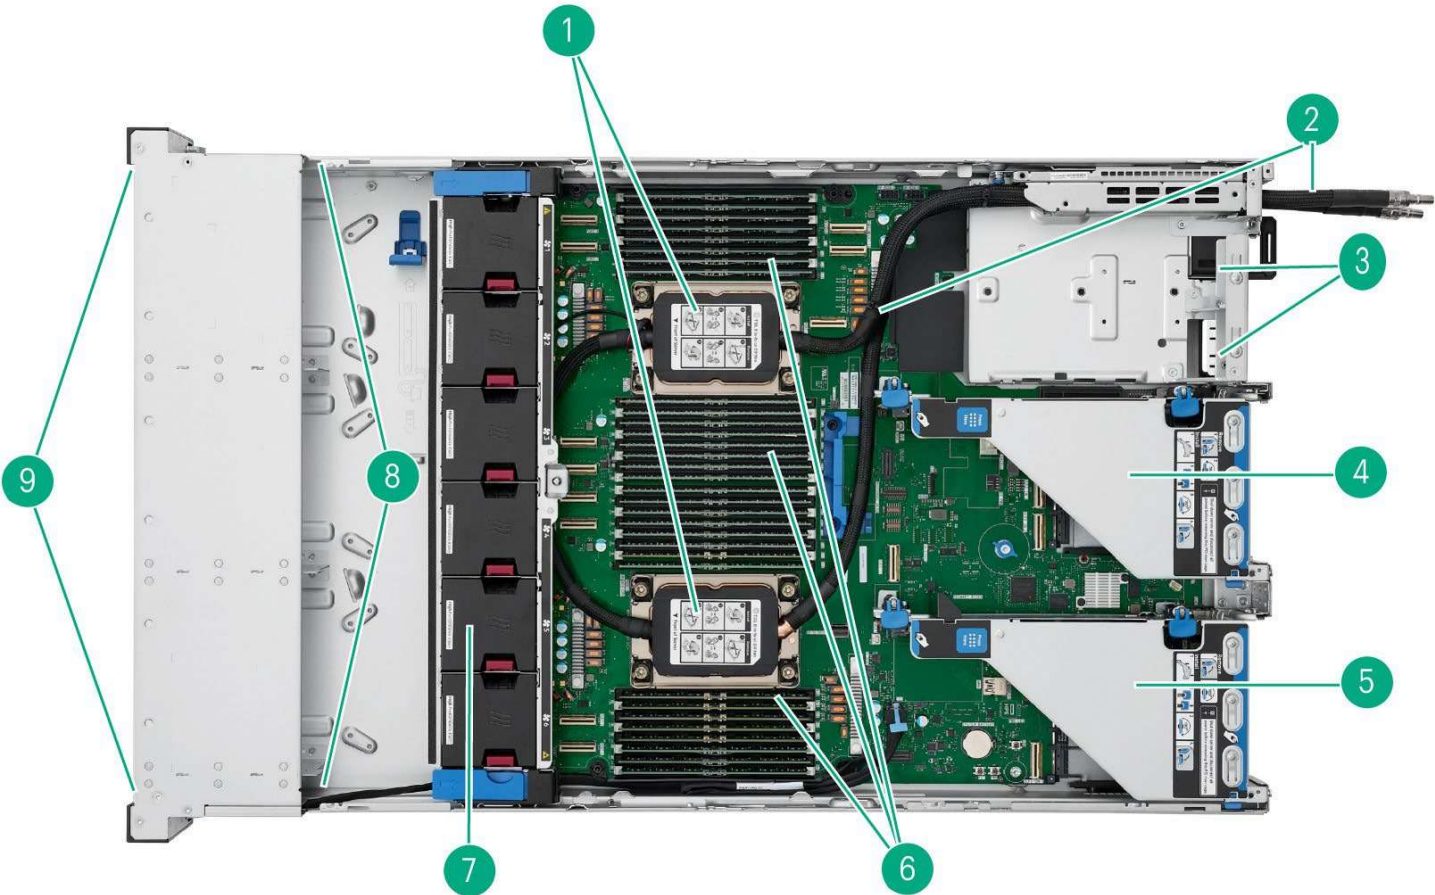


Internal View 12LFF Chassis – Direct Liquid Cooling

Item	Description	Item	Description
1.	Processors, heatsinks (shown)	6.	DIMM slots, shown fully populated in 32 slots
2.	Direct Liquid Cooling tubes (NS204i-u version)	7.	Hot Plug Fans
3.	Hot Plug redundant HPE Flexible Slot Power Supplies	8.	Drive Backplanes
4.	Secondary Riser (Optional shown, Requires second processor)	9.	Drive Cages
5.	Primary Riser		

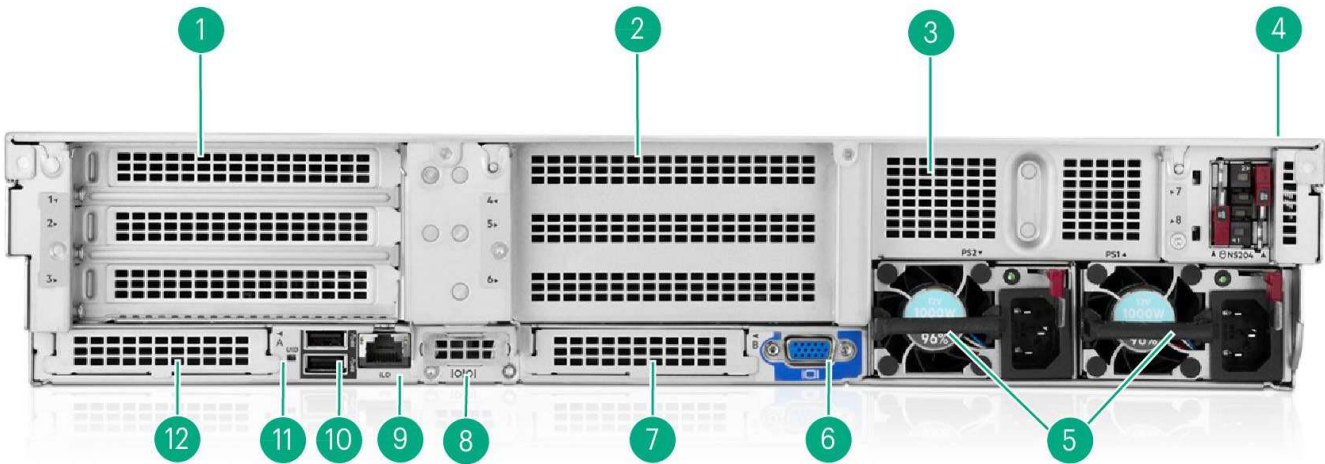

Rear View – DL380 Gen12 Air Cooled

Item	Description	Item	Description
1.	Box 4 for Primary Riser (Default PCIe 5.0 Slots 1, 2 & 3) or optional 2 SFF drive & slot 3 or Optional 2 LFF	7.	OCP 3.0 Slot-B
2.	Box 5 for Secondary Riser (Optional PCIe 5.0 Slots 4, 5 & 6) or optional 2 SFF drives & slot 6 or Optional 2 LFF	8.	Serial Port (Optional)
3.	Box 6 for Tertiary riser (slots 7 & 8) or optional 2 SFF	9.	Dedicated iLO Management Port
4.	NS204i-u Boot Device (Optional)	10.	USB 3.2 Gen 1 Connectors (2)
5.	Power Supply 1 & 2	11.	UID Indicator LED
6.	VGA Connector	12.	OCP 3.0 Slot-A

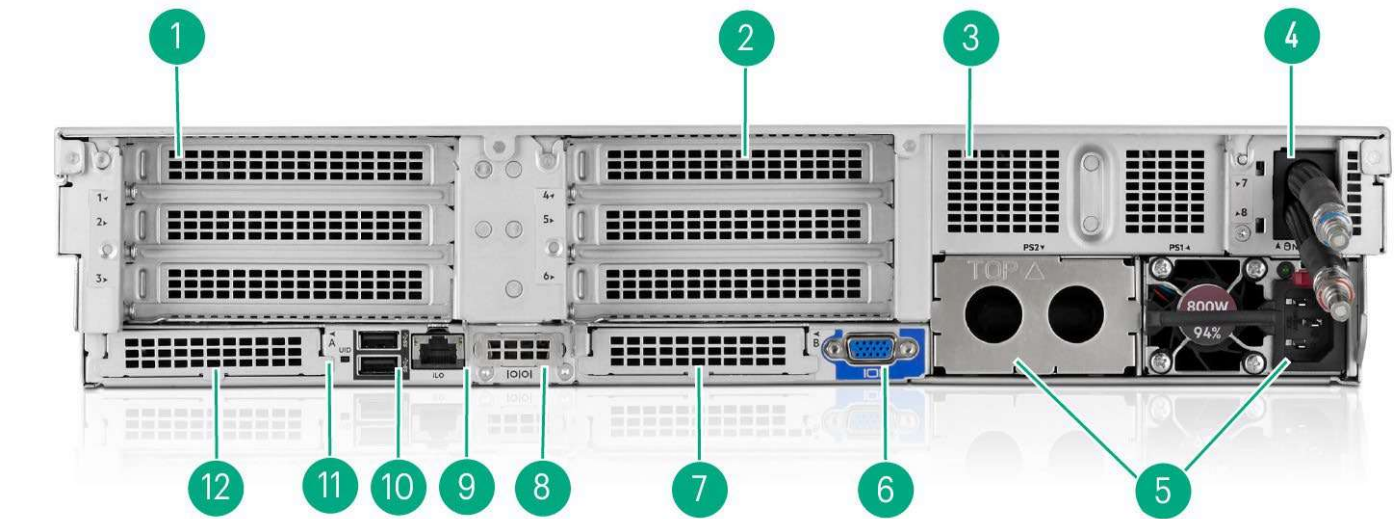

Rear View – DL380 Gen12 Direct Liquid Cooling

Item	Description	Item	Description
1.	Box 4 for Primary Riser (Default PCIe 5.0 Slots 1, 2 & 3) or optional 2 SFF drive & slot 3 or Optional 2 LFF	7.	OCP 3.0 Slot-B
2.	Box 5 for Secondary Riser (Optional PCIe 5.0 Slots 4, 5 & 6) or optional 2 SFF drives & slot 6 or Optional 2 LFF	8.	Serial Port (Optional)
3..	Box 6 for Tertiary riser (slots 7 & 8) or optional 2 SFF	9.	Dedicated iLO Management Port
4.	DLC Tubes (NS204i-u position)	10.	USB 3.2 Gen 1 Connectors (2)
5.	Power Supply 1 (Blank shown for Power Supply 2)	11.	UID Indicator LED
6.	VGA Connector	12.	OCP 3.0 Slot-A

What’s New

- NVIDIA H200 NVL 141GB PCIe Accelerator.
- AMD Solarflare X4522-PLUS 10/25GbE 2-port SFP56 Adapter.
- NVIDIA RTX PRO™ 4500 Blackwell Server.
- HPE MR932i-p x32 Lanes PCIe Gen5 SPDM Plug-in Storage Controller.
- NVIDIA RTX PRO 6000 96GB PCIe Accelerator.

Platform Information

Form Factor

- 2U rack.


Chassis Types

- SFF CTO Server: Supports up to 24SFF front drive cages, or alternate front configurations using the Universal Media Bay, multipurpose cage, and up to 6SFF rear drive cage options.
- 24SFF CTO Server: Includes 24SFF front drive cages and supports up to 6SFF rear drive cage options.
- 8LFF CTO Server: Includes 8LFF front drive cages and supports optional 2SFF front drive cages, optional 4LFF midplane drive cage, and rear drive cage options up to 4LFF or 2SFF.
- 12LFF CTO Server: Includes 12LFF front drive cages and supports optional 4LFF midplane drive cage and rear drive cage options up to 4LFF or 2SFF.
- EDSFF CTO Server: Supports up to 36EDSFF front drive cages, or 12EDSFF plus up to 16SFF front drive cages, and up to 2SFF rear drive cages.

Notes:

- The SFF CTO Server can be configured to support up to 24SFF front drive using supported 8SFF drive cage options, including 8SFF U.3 x1 tri-mode and 8SFF U.3 x4 tri-mode drive cages. See the Drive Cages section for available options.
 - The 8LFF CTO Server cannot be upgraded to 12LFF front drives in the field.
-

Processors

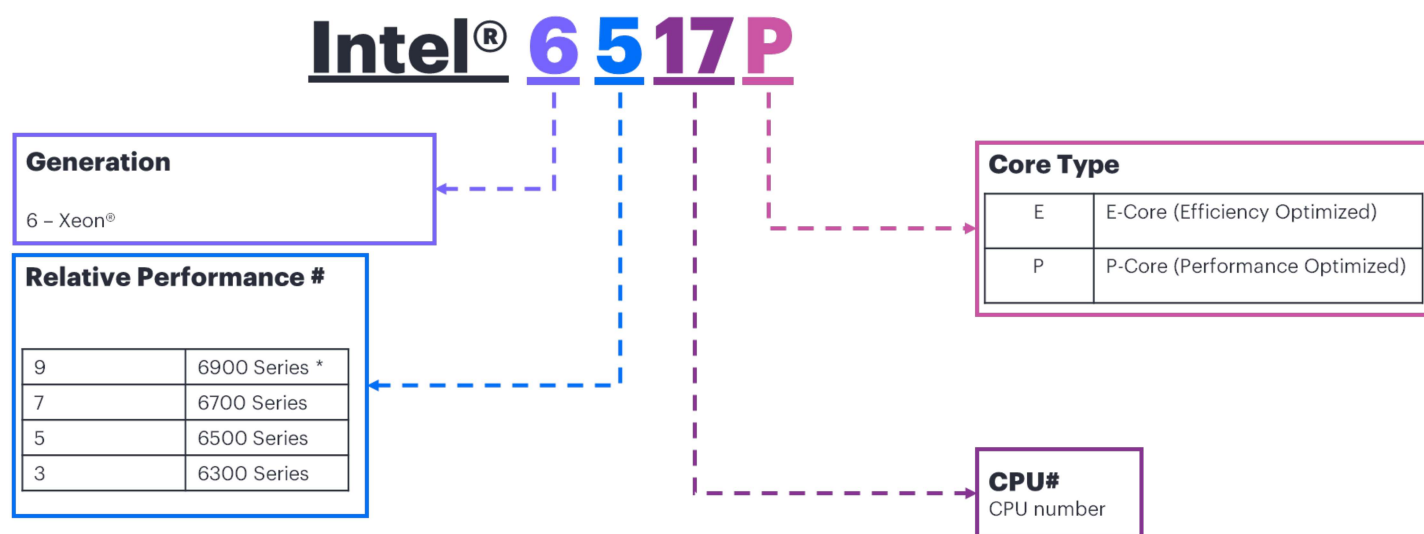

Intel® Xeon® 6 processor naming convention

Notes:

*CPU Series not supported on HPE ProLiant Compute Gen12 platforms.

The information provided here is subject to change without notice. Intel® may make changes to specifications and product descriptions at any time, without notice. Please contact your Intel® representative to obtain the latest Intel® product specifications and roadmaps.

For more information regarding Intel® Xeon® processors, refer to the following <https://www.intel.com/xeon>.

The HPE ProLiant Compute DL380 Gen12 server supports Intel® Xeon® 6.

Up to 2 of the following, depending on the model.

Efficient Core (E-Core) and Performance Core (P-Core) processors.

The below processors are publicly supported on the HPE ProLiant Compute DL380 Gen12 server.

Intel® Xeon 6® Processors with Efficient Cores (E-Cores)								
Performance per Watt Processors								
Intel® Xeon® Models	Base Speed, (GHz)	Cores	L3 Cache (MB)	Power (W)	UPI	DDR5 (MT/s)	SGX Enclave size (GB)	Die
6710E	2.4	64	96	205	4	5600	512	HDCC
6731E	2.2	96	96	250	0	5600	512	HDCC
6740E	2.4	96	96	250	4	6400	512	HDCC
6746E	2.0	112	96	250	4	5600	512	HDCC
6756E	1.8	128	96	225	4	6400	512	HDCC
6766E	1.9	144	108	250	4	6400	512	HDCC
6780E	2.2	144	108	330	4	6400	512	HDCC

Standard Features

Intel® Xeon 6® Processors with Performance-Cores (P-Cores)								
Performance General Purpose Processors								
Intel® Xeon® Models	Base Speed, (GHz)	Cores	L3 Cache (MB)	Power (W)	UPI	DDR5 (MT/s)*	SGX Enclave size (GB)	Die**
6507P	3.5	8	48	150	3	6400	512	LCC
6517P	3.2	16	72	190	3	6400	512	LCC
6527P	3.0	24	144	255	4	6400	512	HCC
6725P	3.7	16	192	235	4	6400	512	HCC
6730P	2.5	32	288	250	4	6400	512	XCC
6732P	3.8	32	144	350	4	6400	512	HCC
6736P	2.0	36	144	205	4	6400	512	HCC
6737P	2.9	32	144	270	4	6400	512	HCC
6745P	3.1	32	336	300	4	6400	512	XCC
6747P	2.7	48	288	330	4	6400	512	XCC
6762P	2.9	64	320	350	4	6400	512	XCC
6767P	2.4	64	336	350	4	6400	512	XCC
6787P	2.0	86	336	350	4	6400	512	XCC

Mainline Processors								
Intel® Xeon® Models	Base Speed, (GHz)	Cores	L3 Cache (MB)	Power (W)	UPI	DDR5 (MT/s)*	SGX Enclave size (GB)	Die**
6505P	2.2	12	48	150	3	6400	128	LCC
6515P	2.3	16	72	150	3	6400	128	LCC
6520P	2.4	24	144	210	4	6400	128	HCC
6530P	2.3	32	144	225	4	6400	128	HCC
6740P	2.1	48	288	270	4	6400	128	XCC
6760P	2.2	64	320	330	4	6400	128	XCC

Socket Scalable Processors								
Intel® Xeon® Models	Base Speed, (GHz)	Cores	L3 Cache (MB)	Power (W)	UPI	DDR5 (MT/s)*	SGX Enclave size (GB)	Die**
6714P	4.0	8	48	195	3	6400	512	LCC
6724P	3.6	16	72	210	3	6400	512	LCC
6728P	2.7	24	144	210	4	6400	512	HCC
6738P	2.9	32	144	270	4	6400	512	HCC
6748P	2.5	48	192	300	4	6400	512	HCC
6768P	2.4	64	336	330	4	6400	512	XCC
6788P	2.0	86	336	350	4	6400	512	XCC

Standard Features

Notes: *Intel® Xeon 6® Processors support DDR5 support maximum memory speed of 6400 MT/s @ 1 DIMMs per channel (DPC) and 6000 MT/s @ 2DPC.

iLO

HPE iLO 7 ASIC.
Read and learn more in the [iLO QuickSpecs](#).

Memory	
Type	HPE DDR5 Smart Memory, Registered (RDIMM)
DIMM Slots Available	32 DIMM Slots, 16 per processor, 8 channels per processor, 2 DIMMs per channel
Maximum capacity	8.0 TB 32 x 256 GB RDIMM 6000MT/s @ 2DPC

- Notes:**
- The maximum memory speed is limited by the processor selection.
 - To realize the performance memory capabilities listed in this document, HPE DDR5 Smart Memory is required.
 - For additional information, please visit the [HPE Memory QuickSpecs and Technical White Papers](#).

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multi-bit errors that occur within a single DRAM chip.

Adaptive Double DRAM Device Correction (ADDDC)

Advanced Double DRAM Device Correction enables the server to dynamically map out a failing DRAM device. Enabling it can have some impact on system performance under certain workloads. This is set to be enabled by default.

Mirroring

Memory Mirroring enables full memory redundancy.

Notes: For additional information, please visit the [HPE Memory QuickSpecs and Technical White Papers](#).

Network Controller

There is no default network controller included. The HPE ProLiant Compute DL380 Gen12 server offers the customer a variety of networking options which are outlined in the Core Options selection in this document.

Standard Features

PCIe Expansion Slots

Notes:

- Bus width indicates the number of electrical lanes connected to the slot. Connector width indicates the physical slot size.
- Installing a PCIe card that requires more lanes than the slot supports may result in reduced performance.
- A second processor is required when selecting a secondary or tertiary riser.
- The 3x16 secondary riser and tertiary riser cannot be selected together.

Final PCIe slot availability is configuration dependent and may vary by riser selection, cable kit selection, processor count, storage configuration, and FIO bundle selection. Validate the final configuration in HPE One Config Advanced.

Primary Riser

Notes: Two Primary Riser types are supported.

Primary Riser Option-1 (Default)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 1
2	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
3	PCIe 5.0	X8	X16	Full-height, half-length slot	Proc 1

Primary Riser Option-2 (P48803-B21)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1 ^a	NA	NA	NA	NA	NA
1 ^b	PCIe 5.0	X16 ^c	X16	Full-height, full-length slot	Proc 1
2	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
3	PCIe 5.0	X16	X16	Full-height, half-length slot	Proc 1

Notes:

- Only one Primary Riser can be selected per server.
- Selecting Primary Riser Option 2 will replace the default Primary Riser Option 1.
- ^a PCIe Slot Availability (Without Cable Kit)
 - If the HPE DL380 Gen12 x16/x16/x16 Cable Kit (P76471-B21) is not selected:
 - Only Slot 2 and Slot 3 are available for PCIe card selection.
 - Slot 1 is disabled (no PCIe cards can be selected).
- ^b Enabling Slot 1 (Full Functionality)
 - To enable Slot 1 on the DL380 Gen11 2U 3x16 Primary Riser Kit:
 - Select Qty 2 × P76471-B21 (HPE DL380 Gen12 x16/x16/x16 Cable Kit), and
 - Select the associated trigger SKU P78117-B21 (HPE ProLiant Compute DL380 Gen12 Primary Riser x16 FIO Bundle Kit).
- ^c Factory Bundle Kit Behavior (Slot 1 bandwidth):
 - For the following bundle kits:

Standard Features

- P77961-B21 (HPE ProLiant Compute DL380 Gen12 24SFF x2 Direct Attach x16/x16/x16 OCP FIO Bundle Kit)
- P77946-B21 (HPE ProLiant Compute DL380 Gen12 12EDSFF x16/x16/x16 OCP Direct Attach PCIe FIO Bundle Kit)
- P77964-B21 (HPE ProLiant Compute DL380 Gen12 12EDSFF x2 1P Direct Attach x16/x16/x16 PCIe FIO Bundle Kit)
- Slot 1 operates at x8 (not x16)

Secondary Riser Option 1 (P48802-B21)

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 2
5	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
6	PCIe 5.0	X8	X16	Full-height, half-length slot	Proc 2

Secondary Riser Option 2 (P51083-B21)

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4*	NA	NA	NA	NA	NA
4**	PCIe 5.0	X16***	X16	Full-height, full-length slot	Proc 2
5	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
6	PCIe 5.0	X16	X16	Full-height, half-length slot	Proc 2

Notes:

- *If the HPE DL380 Gen12 x16/x16/x16 Cable Kit (P76471-B21) is not selected:
 - Only Slot 5 and Slot 6 are available.
 - Slot 4 is disabled (no PCIe card support).
- ** To enable Slot 4:
 - Select Qty 2 × P76471-B21 (HPE DL380 Gen12 x16/x16/x16 Cable Kit), and
 - Select trigger SKU P78120-B21.
- *** Factory Bundle behavior (Slot 4 bandwidth):
 - For the following bundle kits:
 - P77961-B21 (HPE DL380 Gen12 24SFF x2 Direct Attach x16/x16/x16 OCP FIO Bundle Kit).
 - P77946-B21 (HPE DL380 Gen12 12EDSFF Direct Attach x16/x16/x16 OCP FIO Bundle Kit).
 - Slot 4 operates at x8 (not x16).

Tertiary Riser**Notes:**

- Up to one Tertiary Riser can be selected per server.
- Two Tertiary Riser options are supported.

Standard Features

Tertiary Riser Option-1 (P76451-B21)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
7	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
8	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2

Tertiary Riser Option-2 (P74737-B21)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
7	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
8	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 2

Standard Features

OCP Expansion Slots

Expansion Slots #	HPE Part No.	Technology	Bus Width	Connector Width
1 Rear OCP A ² (OCP 3.0) embedded	Default & P72201-B21	PCIe 5.0	x 8 ¹	x16
1 Rear OCP B (OCP 3.0) optional cabled	P72203-B21, P72205-B21 & P72207-B21	PCIe 5.0	x 8 ¹	x 16
1 Front Primary OCP ² (OCP3.0) (Box 2, Bay 9)	P74757-B21	PCIe 5.0	x16	x16
1 Front Secondary OCP (OCP3.0) (Box 2, Bay 11)	P74758-B21	PCIe 5.0	x16	x 16

Notes:

- ¹Can be extended to x16 with one processor if we don't use the other OCP, with 2 processors we can have both OCPA and OCP B as x16.
- ²Provides the share-NIC function with Network Controller Sideband Interface (NCSI). Front and rear OCPs cannot be enabled at the same time.
- Front OCPs are enabled with the multipurpose cage (only with SFF and EDSFF CTO Server) and can only support networking cards.

OCP 3.0 Slot Priority Support Matrix

OCP Slot Location	1 OCP Storage Controller (OROC) + 1 OCP NIC	1 OCP NIC (if both OCPs are enabled)	2 OCP NICs	1 OCP Storage Controller (OROC)	2 OCP Storage Controllers (OROC)
OCP A	OROC	N/A	OCP NIC	OROC (Higher priority)	OROC (Higher priority)
OCP B	OCP NIC	NIC (higher priority)	OCP NIC (higher priority)	N/A	OROC

Standard Features

Internal Storage Devices

- **Optical Drive** - Available on SFF and EDSFF CTO Servers as an option (DVD-ROM or DVD-RW).
- **Hard Drives** - None ship standard.

Graphics

Integrated Video Standard

- VGA Port in the rear.
- DisplayPort with optional optical disk drive.
- Video modes up to 1920 x 1200@60Hz (32 bpp).
- 16MB Video Memory.

Maximum Internal Storage

Drive	Total Storage	Configuration
Hot Plug SFF SAS HDD	72 TB	24 + 6 x 2.4 TB
Hot Plug SFF SAS SSD	460.8 TB	24 + 6 x 15.36 TB
Hot Plug SFF SATA HDD	60 TB	24 + 6 x 2 TB
Hot Plug SFF SATA SSD	230.4 TB	24 + 6 x 7.68 TB
Hot Plug LFF SAS HDD	360 TB	12+ 4+ 4 x 18 TB
Hot Plug LFF SAS SSD	480 TB	12+ 4+ 4 x 24 TB
Hot Plug LFF SATA HDD	360 TB	12+4+4 x 18 TB
Hot Plug LFF SATA SSD	480 TB	12+4+4 x 24 TB
Hot Plug SFF NVMe SSD	921.6TB	24+6 x 30.72 TB
EDSFF NVMe	1.1 PB	36 x 30.72 TB

Interfaces

Serial Port	1 Optional rear.
DisplayPort	1 optional front DisplayPort via Universal Media Bay. (Supported only on SFF and EDSFF CTO Server.)
VGA Port	1 standard, rear.
Network Ports	None as standard. The choice of stand-up or OCP networking card is required.
HPE iLO Remote Management Network Port	1 Gb Dedicated, rear.
Front iLO Service Port	1 standard (Not available when System Insight Display Kit is ordered).
USB 3.2 Port Gen 1	Up to 5 total: 1 front (3.2 Gen 1), 2 rear (3.0), 2 internal (3.0), 2 optional USB 2.0 front via Universal Media Bay.
System Insight Display (SID)	Optional, front. Supported with SFF and EDSFF CTO Server only.

Standard Features

Operating Systems and Virtualization Software Support for HPE Servers

HPE servers are designed for seamless integration with partner Operating Systems and Virtualization Software. By collaborating closely with our partners, we ensure that their products are optimized, certified, and fully supported within your HPE server environment.

Access the certified and supported servers for each of the OS and Virtualization software: [HPE Servers Support & Certification Matrices](#)

HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Compute Gen12 servers have a UEFI Class 3 implementation to support UEFI Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <https://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security.
- Embedded UEFI Shell.
- Operating system specific functionality.
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant.
- Support for > 2.2 TB (using GPT) boot drives.
- PXE boot support for IPv6 networks.
- USB 3.0 Stack.
- Workload Profiles for simple performance optimization.

UEFI Boot Mode only

- TPM 2.0 Support.
Notes: Enabling TPM 2.0 no longer requires TPM module option kit for Gen12. It is an embedded feature.
- iSCSI Software Initiator Support.
- NVMe Boot Support.
- HTTP/HTTPS Boot support as a PXE alternative.
- Platform Trust Technology (PTT) can be enabled.
- Boot support for option cards that only support a UEFI option ROM.

Notes: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

Industry Standard Compliance

- ACPI 6.5 Compliant.
- PCIe 5.0 Compliant.
- Wake on LAN (WOL) Support.
- Microsoft® Logo certifications.
- PXE Support.
- VGA.

Standard Features

- DisplayPort.

Notes: This support is on the optional Universal Media Bay.

- USB 3.2 Gen1 Compliant.
- USB 2.0 Compliant (via Universal Media Bay).

Notes: This support is on the optional Universal Media Bay.

- Energy Star.
- SMBIOS 3.7.
- Unified Extensible Firmware Interface (UEFI) 2.10.
- UEFI Class 3.
- Redfish API.
- IPMI 2.0.
- Advanced Encryption Standard (AES).
- SNMP v3.
- TLS 1.2.
- DMTF Redfish support for Secure Boot Key Management.
- ACPI DSM Drive LED Management.
- Memory Page Retire Support.
- Retire old VMware Secure Boot Key.
- APML.
- Active Directory v1.0.
- ASHRAE A3/A4.

Notes: For additional technical, thermal details regarding ambient temperature, humidity, and feature support, please visit [DL380 Gen12 Extended Ambient Temperature Guidelines](#).

HPE Compute Ops Management

Transform compute lifecycle management with a cloud experience that delivers greater simplicity, agility, and speed across your entire server environment, wherever it lives. This software-as-a-service tool provides a dashboard with global visibility and intuitive management of server health, security and compliance status to help you easily identify areas that need immediate attention. Users can update tens to thousands of servers faster through intelligent delta-based firmware downloads and on-demand HPE iLO firmware updates.

HPE Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and firmware packs. The management application resides in GreenLake cloud (access via <https://common.cloud.hpe.com>) and leverages the GreenLake architecture, security, and unified operations.

A 3-year subscription to HPE Compute Ops Management is added by default when ordering an HPE ProLiant Compute Gen12 rack or tower server.

For more information, visit the HPE Compute Ops Management QuickSpecs:
<https://www.hpe.com/psnow/doc/a50004263enw>

Standard Features

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <https://www.hpe.com/info/iLO>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

OpenBMC Support

OpenBMC Capable through iLO7 Transfer of Ownership Process.

Learn more at [OpenBMC Support](#)

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at [HPE Intelligent Provisioning](#).

Notes: Please refer to [Advisory: HPE ProLiant Compute Gen12 Servers - HPE Intelligent Provisioning 5.00 Is Available with Limited Feature Support](#).

iLO RESTful API

iLO RESTful API is DMTF Redfish API implementation and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at

<https://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <https://www.hpe.com/servers/ahs>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP).

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <https://www.hpe.com/info/resttool>.

HPE OneView Standard

HPE OneView is an on premise, multi-generational server monitoring and management solution. HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. Customers can upgrade their management experience with an HPE OneView Advanced license all provided by the same tool. Learn more at <https://www.hpe.com/info/oneview>.

Standard Features

Security

Experience unparalleled security benefits with HPE ProLiant Compute Gen12 servers, designed to enhance your infrastructure's security and performance. These servers come equipped with cutting-edge embedded security features, ensuring robust protection for your critical data and applications. Key features include:

- **HPE Integrated Lights-Out (HPE iLO7):** This product offers advanced embedded security features for monitoring, service alerting, reporting, and remote management.
- **Enhanced Server Data Security:** Encryption and key management, iLO Managed Encryption, UEFI-managed encryption, and self-encrypting drives (SED) for enhanced data-at-rest protection.
- **Sanitize Data with One-Button Secure Erase:** This method complies with NIST SP 800-88 guidelines for media sanitization, ensuring the secure decommissioning of servers.
- **Expanded Industry Security Compliance:** Adherence to standards such as FIPS 140-3, NIST SP 800-53, NIST SP 800-171, and NIST SP 800-88.
- **HPE Compute Ops Management:** Provides an intuitive cloud operating experience, ensuring streamlined and highly secure operations.
- **Physical Security Options:** System maintenance switch, USB security, rack and power security, bezel lock, and chassis intrusion detection switch.
- **HPE Trusted Supply Chain:** HPE Trusted Supply Chain offers enhanced security and compliance for organizations worldwide. Servers built with this option undergo rigorous inspections and checkpoints to detect and mitigate malicious microcode and counterfeit parts throughout the server build and lifecycle.

Please refer to the HPE ProLiant Compute Gen12 Embedded Security QuickSpecs document for more detailed information at: <https://www.hpe.com/psnow/doc/a50009218enw>.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Services operational services or customized service agreements. Hard drives have either a one year or three-year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be completed by Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. Travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available.

<https://www.hpe.com/support/ProLiantServers-Warranties>.

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView Advanced offers a sophisticated level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It builds upon the base features of HPE OpenView Standard, provides full-featured licenses which can be purchased for managing multiple HPE server generations.

To learn more visit <https://www.hpe.com/info/oneview>.

One Config Simple (OCS/SCE)

OCS/SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use it in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10-year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type of workload. Some UPSs include options for remote management and extended runtime modules, so your critical dense data center is covered in power outages.

HPE KVM Solutions includes a console, and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple-connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

HPE Services

No matter where you are on your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where, and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

Consulting Services

No matter where you are on your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](#)

Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

HPE Complete Care Service

HPE Complete Care Service is a modular, IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach.
- An assigned HPE team.
- Modular and fully personalized engagement.
- Enhanced Incident Management experience with priority access.
- Digitally enabled and AI-driven customer experience.

<https://www.hpe.com/services/complecare>

Service and Support

HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI-driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI-driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available on three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential, which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical, which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, considering the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, considering the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

Notes: To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

Other Related Services from HPE Services:

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

Service and Support

Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and service options.

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>

AI-Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpesc/public/home/signin>

GreenLake

[GreenLake](#) is the cloud to run and manage your entire hybrid landscape—private, public, and edge. It helps you to:

- Streamline IT Operations across compute, storage, and networking without the chaos.
- Unify and secure data, as you move faster.
- Accelerate AI, from pilot to production.

The result: greater operational efficiency, lower TCO, and faster AI delivery—all from one unified, intelligent platform built for today's hybrid enterprise.

Configuration Information

HPE Smart Choice Purchase Program

The HPE Smart Choice Purchase Program offers popular, factory-configured products that can be quoted in minutes and delivered quickly through HPE Authorized Partners. These Smart Choice SKUs replace the previous BTO SKUs, streamlining the purchasing process. Each system is configured and tested at an HPE facility, stocked with Authorized Distributors and Partners, and shipped in a single box to simplify and accelerate on-site integration. When you purchase an HPE Smart Choice product, you also gain access to exclusive, competitively priced HPE Tech Care Services available only through the Smart Choice Purchase Program. Please visit the [Smart Choice Supplemental QuickSpecs](#) or the [website](#) for details.

Configuration Details

This section lists some of the steps required to configure a Factory Integrated Model.

To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.
- HPE ProLiant Compute DL380 Gen12 is highly configurable, the configuration information below does not include all CTO configuration rules. Please use one of HPE's approved configurators for the final configuration validation.

SAP Solution Configuration

For customers configuring the HPE ProLiant Compute DL380 Gen12 for SAP solutions, please use the following solution SKU:

- P79970-B21 HPE ProLiant Compute DL380 Gen12 Solution Server.
- For additional details on HPE's SAP solutions, please visit the HPE SAP solutions portfolio on [HPE.com](#).

Configuration Information

Step 1: Base Configuration (choose one of the following configurable server models)

CTO Server models do not include embedded LOM. To enable networking capability please select a validated alternative NIC -OCP or PCIe- from the Core Options section.

CTO Server	HPE ProLiant Compute DL380 Gen12 SFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 24SFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 12LFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 8LFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 EDSFF NC Configure-to-Order Server
SKU Number	P73282-B21	P73283-B21	P73284-B21	P73285-B21	P73286-B21
TAA SKU*	P73282-B21#GTA	P73283-B21#GTA	P73284-B21#GTA	P73285-B21#GTA	P73286-B21#GTA
Processor	Not included as default				
Memory	32-DIMM slots for HPE ProLiant Compute DDR5 Smart Memory Not included as default – select capacity and quantity from available DIMMs				
DIMM Blanks	Optional – Not included as default.				
Heat Sinks	Choice of standard, performance, high performance or max performance heatsinks				
Fans	Included as default in the following quantities:				
	4-Standard	6-High Performance	6-Standard	4-Standard	6-Standard
Rear PCIe Slots	– Up to 8 PCIe Gen5 slots (up to 6 x16 & up to 2 x8) – Default primary riser slots 1, 2 & 3 (x8 x16 x8 bus width) – Optional secondary and tertiary risers				
OCP 3.0 - Rear	Up to 2 PCIe 5.0; OCP A (Default) and OCP B (Optional)				
Network Controller	No embedded networking. Choice of either OCP 3.0 or select stand-up network adapters for primary networking selection plus additional/optional stand-up network adapters.				
Storage Controller	Not included as default. Choice of – Intel® Virtual RAID on CPU (VROC) for HPE ProLiant. – HPE Compute MR Gen11 Controllers. – HPE NS204i-u V2 NVMe Hot Plug Boot Optimized Storage Device at Rear, internal or front cage (front cage is available in SFF/EDSFF CTO Server only).				
I/O Ports	– Front: 1 USB 3.2 Gen1, 1 USB-C iLO service port, 1 DisplayPort (optional), 2 USB 2.0 (optional via UMB). – Rear: Two (2) USB 3.2 Gen1, 1 iLO Management Ethernet Port, VGA port, 1 optional Serial Port. – Internal: Two (2) USB 3.0.				
Security	Trusted Platform Module (TPM) 2.0. It is an embedded feature globally and can be disabled in the BIOS setting.				
HPE Trusted Supply Chain	P36394-B21 – Optional.				
Rail Kit	Optional Easy Install rails and CMA.				

Configuration Information

Form Factor	2U
Management	HPE iLO with Intelligent Provisioning (standard), iLO Advanced and OneView (optional) Notes: Please refer to Advisory: HPE ProLiant Compute Gen12 Servers - HPE Intelligent Provisioning 5.00 Is Available with Limited Feature Support .
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.

CTO Server	HPE ProLiant Compute DL380 Gen12 SFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 24SFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 12LFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 8LFF NC Configure-to-Order Server	HPE ProLiant Compute DL380 Gen12 EDSFF NC Configure-to-Order Server
SKU Number	P73282-B21	P73283-B21	P73284-B21	P73285-B21	P73286-B21
Front Drive Cages – Included	None by default Select from available options	Qty-3 of 8SFF x1 U.3	Qty-3 of 4LFF	Qty-2 of 4LFF	None by default Select from available options
Front Drive Cages Options	– DL3XX Gen12 8SFF x1 U.3 TM Kit (P75740-B21) or/and – DL3XX Gen12 8SFF x4 U.3 TM Kit (P75741-B21) or/and – DL3XX Gen12 Multipurpose Drive Cage Kit (P76449-B21)	Not available	Not available	Not available	– HPE Gen12 12EDSFF Kit (P74738-B21) and – HPE DL3XX Gen12 8SFF x4 U.3 TM Kit (P75741-B21) or – DL3XX Gen12 8SFF x1 U.3 TM Kit (P75740-B21) or/and – DL3XX Gen12 Multipurpose Drive Cage Kit (P76449-B21)
Optional 2 SFF Drives (Front)	– DL3XX Gen12 Front SFF for 2SFF Enablement U.3 HDD Front Cage Kit (P75807-B21)	Not available	Not available	– DL3XX Gen12 Front LFF for 2SFF Enablement Side-by-Side U.3 HDD Front Cage Kit (P74744-B21)	Not available

Configuration Information

4 LFF Drives in Midplane Cage	Not available	Not available	DL380 Gen12 4LFF SAS/SATA LP Midplane Drive Cage Kit (P74741-B21)		Not available
Rear Drive Cage Options	Up to 6 SFF in rear – DL380 Gen12 2SFF Rear Primary/Secondary Riser Cage Kit (P74734-B21) – DL3XX Gen12 Rear 2SFF U.3 HDD Stacking Drive Cage Kit (P74743-B21)		Option 1: Up to 4 LFF or 2 SFF Option 2: 2 LFF or/and 2 SFF – DL380 Gen12 2LFF Rear Primary Drive Cage Kit (P74746-B21) – DL380 Gen12 2LFF Rear Secondary Drive Cage Kit (P76875-B21) – DL380 Gen12 2LFF Rear/Tertiary Drive Cage Kit (P75411-B21) – DL3XX Gen12 Rear 2SFF U.3 HDD Stacking Drive Cage Kit (P74743-B21)		2 SFF in rear – DL3XX Gen12 Rear 2SFF U.3 HDD Stacking Drive Cage Kit (P74743-B21)
Universal Media Bay	1 Optional	Not available	Not supported	Not supported	Not supported
Optical Disk Drive	1 Optional with UMB	Not available	Not available	1 Optional with ODD Enablement Kit	Not supported

Notes:

- *HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed into a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- Energy Star 4.0 Compliance: No restriction from processors when server shipment starts, but the Platinum Power Supply 800W & 1600W are not compatible.

Configuration Information

STEP 1: PROCESSORS**Step 1a: Processors****Intel® Xeon 6® Scalable Processors****Notes:**

- Mixing of 2 different processor models is NOT allowed.
- 4LFF Midplane drive cage (P74741-B21) can be selected with 225W or below Processors only.

Intel® Xeon 6® Scalable Processors with Efficient-Cores (E-Cores)**Efficient – Performance per Watt**

Intel Xeon 6710E 2.4GHz 64-core 205W Processor for HPE	P71117-B21
Intel Xeon 6731E 2.2GHz 96-core 250W Processor for HPE	P71118-B21
Intel Xeon 6740E 2.4GHz 96-core 250W Processor for HPE	P71119-B21
Intel Xeon 6746E 2.0GHz 112-core 250W Processor for HPE	P71120-B21
Intel Xeon 6756E 1.8GHz 128-core 225W Processor for HPE	P71121-B21
Intel Xeon 6766E 1.9GHz 144-core 250W Processor for HPE	P71122-B21

Efficient – Performance

Intel Xeon 6780E 2.2GHz 144-core 330W Processor for HPE	P71124-B21
---	------------

Intel® Xeon 6® Processors with Performance-Cores (P-Cores)**Performance - General Purpose**

Intel Xeon 6507P 3.5GHz 8-core 150W Processor for HPE	P74504-B21
Intel Xeon 6517P 3.2GHz 16-core 190W Processor for HPE	P74507-B21
Intel Xeon 6527P 3.0GHz 24-core 255W Processor for HPE	P74570-B21
Intel Xeon 6725P 3.7GHz 16-core 235W Processor for HPE	P87302-B21
Intel Xeon 6730P 2.5GHz 32-core 250W Processor for HPE	P74573-B21
Intel Xeon 6732P 3.8GHz 32-core 350W Processor for HPE	P74578-B21
Intel Xeon 6736P 2.0GHz 36-core 205W Processor for HPE	P74575-B21
Intel Xeon 6737P 2.9GHz 32-core 270W Processor for HPE	P74576-B21
Intel Xeon 6745P 3.1GHz 32-core 300W Processor for HPE	P81591-B21
Intel Xeon 6747P 2.7GHz 48-core 330W Processor for HPE	P73831-B21
Intel Xeon 6762P 2.9GHz 64-core 350W Processor for HPE	P90157-B21
Intel Xeon 6767P 2.4GHz 64-core 350W Processor for HPE	P73834-B21
Intel Xeon 6787P 2.0GHz 86-core 350W Processor for HPE	P73837-B21

Mainline Processors

Intel Xeon 6505P 2.2GHz 12-core 150W Processor for HPE	P74503-B21
Intel Xeon 6515P 2.3GHz 16-core 150W Processor for HPE	P74506-B21
Intel Xeon 6520P 2.4GHz 24-core 210W Processor for HPE	P74568-B21
Intel Xeon 6530P 2.3GHz 32-core 225W Processor for HPE	P74571-B21
Intel Xeon 6740P 2.1GHz 48-core 270W Processor for HPE	P73829-B21
Intel Xeon 6760P 2.2GHz 64-core 330W Processor for HPE	P73832-B21
Intel Xeon 6714P 4.0GHz 8-core 165W Processor for HPE	P74508-B21

Configuration Information

Intel Xeon 6724P 3.6GHz 16-core 210W Processor for HPE	P74509-B21
Intel Xeon 6728P 2.7GHz 24-core 210W Processor for HPE	P74572-B21

Scalable Socket Processors

Intel Xeon 6738P 2.9GHz 32-core 270W Processor for HPE	P74577-B21
Intel Xeon 6748P 2.5GHz 48-core 300W Processor for HPE	P74579-B21
Intel Xeon 6768P 2.4GHz 64-core 330W Processor for HPE	P73835-B21
Intel Xeon 6788P 2.0GHz 86-core 350W Processor for HPE	P73838-B21

Step 1b: Heatsink**Notes:**

- One Config Advanced automatically selects the required heat sink option based on the selected processor model and system thermal requirements.
- Mixing heat sink types is not supported.

HPE ProLiant DL380 Gen11 Standard Heat Sink Kit	P49145-B21
---	------------

Notes:

- 2U heat sink.
- Includes one heat sink.
- Supports processors up to 185W.

HPE ProLiant Compute DL380 Gen12 Max Performance Heat Sink Kit	P74794-B21
--	------------

Notes:

- 2U heat sink.
- Supported with 2-processor configurations only.
- Includes two heat sinks.

HPE ProLiant Compute DL380 Gen12 Performance Heat Sink Kit	P74792-B21
--	------------

Notes:

- 2U heat sink.
- Includes one heat sink.

HPE ProLiant DL3XX Gen12 High Performance Heat Sink Kit	P74787-B21
---	------------

Notes:

- 1U heat sink.
- Includes one heat sink.

Direct Liquid Cooling (DLC) Modules**Notes:**

- Direct Liquid Cooling (DLC) module configurations include two cold plate modules and one quick disconnect module.
- DLC modules cannot be mixed with air-cooled heat sink kits.
- DLC modules and the mid tray cannot be selected together.
- Two DLC module options are available:
- NS204i-u DLC configuration.
- PCIe DLC configuration.
- The required quick-disconnect tube set depends on the selected DLC module location.

Configuration Information

HPE ProLiant Compute DL380 Gen12 Cold Plate Module FIO Kit from PCIe NS204

P74204-B21

Notes

- Requires Qty 1 of 65cm Quick Disconnect Tube Set FIO Kit (P62038-B21).
- Cannot be selected with the NS204i-u Rear Enable Kit (P74755-B21).

HPE ProLiant Compute Direct Liquid Cooling 65cm Quick Disconnect Tube Set FIO Kit

P62038-B21

Notes: Provides the 65cm quick-disconnect tube set required for the NS204i-u DLC configuration.

HPE ProLiant Compute DL3XX Gen12 Cold Plate Module FIO Kit from PCIe

P74208-B21

Notes:

- Requires Qty 1 of 55cm Quick Disconnect Tube Set FIO Kit (P62042-B21).
- Requires a Secondary Riser Kit.
- PCIe Slot 6 on the Secondary Riser is unavailable when this kit is selected.

HPE ProLiant DL3XX Gen11 Direct Liquid Cooling 55cm Quick Disconnect Tube Set FIO Kit

P62042-B21

Notes:

- Maximum quantity: 1
- Supported with the PCIe DLC configuration.

HPE Gen12 DLC Infrastructure**Notes:**

- iLO 7 provides built-in leak detection alerting and can initiate system shutdown if a leak event is detected.
- HPE ProLiant DL3XX Gen12 Direct Liquid Cooling solutions require compatible rack-level liquid cooling infrastructure, including a supported 800mm x 1200mm HPE rack, rack manifold, coolant distribution unit (CDU), primary hose kit, and secondary hose kit.
- The required DLC rack infrastructure must be included and validated for the DLC server configuration to function.
- Supported DLC rack options include:
 - Rack 42U 800mm x 1200mm Enterprise G2, applicable for DL3XX Gen12 DLC.
 - Rack 48U 800mm x 1200mm Enterprise G2, applicable for DL3XX Gen12 DLC.
- HPE Services should be engaged to validate and enable the complete DLC rack solution.
- Key DLC infrastructure validation factors include:
 - Server-to-manifold connectivity.
 - DLC rack capability, including liquid supply temperature, loop flow rate, and CDU capacity.
 - CDU settings, including coolant type, number of servers per rack, and any mixed-server rack configuration.
- If a customer already has compatible HPE DLC rack infrastructure installed, standalone server shipment or field upgrade may be supported by exception. Approval from ProLiant Product Management is required, and the existing infrastructure must be validated before shipment.

STEP 2: MEMORY**Step 2a: Memory Options**

For detailed information on HPE server memory options, population rules, whitepapers and optimal memory performance guidelines, please go to:

[HPE Memory QuickSpecs and Technical White Papers.](#)

Configuration Information

Registered DIMMs DDR5 (RDIMMs)

HPE 16GB (1x16GB) Single Rank x8 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69726-B21
---	------------

Notes: 16 GB memory can only be supported with 1DPC configurations.

HPE 32GB (1x32GB) Dual Rank x8 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69727-B21
---	------------

HPE 64GB (1x64GB) Dual Rank x4 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69728-B21
---	------------

HPE 96GB (1x96GB) Dual Rank x4 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69729-B21
---	------------

HPE 128GB (1x128GB) Dual Rank x4 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69730-B21
---	------------

HPE 256GB (1x256GB) Quad Rank x4 DDR5-6400 CAS-60-52-52 EC8 Registered 3DS Smart Memory Kit	P73447-B21
---	------------

Notes: The -B21 memory SKUs shown in this document are to be used when ordering stand-alone memory only. For each -B21 SKU, there is a corresponding -F21 SKU which is to be used when configuring servers with integrated memory DIMMs.

Step 2b: Memory Blank Kit

HPE DDR4 DIMM Blank Kit	P07818-B21
-------------------------	------------

Notes:

- DIMM blank used in empty memory slots to help maintain proper system airflow.
- DIMM blanks are optional and are not required.

STEP 3: SMART CHASSIS

Smart Chassis is a feature in One Config Advanced (OCA) that automatically selects the required cable kits based on the chosen drive cages and storage controllers.

Notes:

- Internal Storage Cable Kits are not part of the Smart Chassis selection.
- After completing your Smart Chassis configuration, set the Smart Chassis quantity to 1. OCA will automatically select the required cables, which will appear under Storage Devices (Step 5) > Internal Storage Controller Cables.
- No manual cable selection is required.

Follow the steps below to configure your Smart Chassis:

3a. Top-Selling Smart Chassis Configurations (Optional)**Notes:**

- These configurations represent the most commonly ordered customer setups.
- Selecting a top-selling configuration will automatically pre-populate:
 - Drive cage(s).
 - Direct Attach FIO Bundle Kit (If applicable).
 - Riser card(s).
 - Riser accessories.
 - Storage controller.
- You can modify any of these selections or adjust quantities as needed.

3b: Drive Cage(s)

HPE ProLiant Compute DL3XX Gen12 8SFF x1 U.3 Tri-Mode Drive Cage Kit	P75740-B21
--	------------

Notes:

- Adds an 8SFF U.3 x1 tri-mode cage for SAS, SATA, or NVMe drives when connected to an MR tri-mode controller.
- Available with SFF and EDSFF CTO Server models only.

Configuration Information

HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit

P75741-B21

Notes:

- Adds an 8SFF U.3 x4 cage for higher-bandwidth NVMe storage, either direct-attached to the processors or connected to a tri-mode controller.
- Supported connection: x4 (Higher PCIe bandwidth) and x2 (Reduced PCIe Bandwidth).
- Available with SFF and EDSFF CTO Server models only.

HPE ProLiant Compute DL3XX Gen12 Multipurpose Drive Cage Kit

P76449-B21

Notes:

- Adds the multipurpose cage in Box 2 so the server can host front NS204i-u, front OCP NICs, and/or a 4EDSFF drive cage.
- Available with SFF and EDSFF CTO Server models only.

HPE ProLiant Compute Gen12 4EDSFF Drive Cage Kit

P76450-B21

Notes:

- Adds a 4EDSFF drive cage that fits inside the multipurpose cage.
- Available with SFF and EDSFF CTO Server models only.

HPE ProLiant Compute DL3XX Gen12 Rear 2SFF U.3 HDD Stacking Drive Cage Kit

P74743-B21

Notes:

- Replaces Tertiary riser position with rear stacked 2SFF U.3 drive cage above the power supplies.
- Available with all CTO Server models.

HPE ProLiant Compute DL380 Gen12 2SFF Rear Primary/Secondary Riser Cage Kit

P74734-B21

Notes:

- Replaces a primary or secondary riser position with a rear 2SFF cage while retaining one PCIe slot in that riser position.
- Available with SFF and 24SFF CTO Server models only.

HPE ProLiant Compute DL3XX Gen12 SFF Universal Media Bay Kit

P74749-B21

Notes:

- Converts Box 1 into the Universal Media Bay, adding support for front Display Port, two front USB 2.0 ports, an internal optical drive, and the optional front 2SFF cage.
- Available with SFF CTO Server model only.

HPE ProLiant Compute DL3XX Gen12 Front SFF for 2SFF Enablement U.3 HDD Front Cage Kit

P75807-B21

Notes:

- Adds a front stacked 2SFF U.3 cage in the Universal Media Bay for two front SFF drives.
- Available with SFF CTO Server model only.

HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit

P74738-B21

Notes:

- Adds a 12EDSFF drive cage for high-density front EDSFF NVMe storage.
- Available with EDSFF CTO Server model only.

HPE ProLiant Compute DL3XX Gen12 Front LFF for 2SFF Enablement Side-by-Side U.3 HDD Front Cage Kit

P74744-B21

Notes:

- Adds a front side-by-side 2SFF U.3 cage for 8LFF CTO server model
- Available with 8LFF CTO Server model only

Configuration Information

HPE ProLiant Compute DL380 Gen12 2LFF Rear Primary Drive Cage Kit

P74746-B21

Notes:

- Adds a rear 2LFF drive cage in the primary rear cage position in place of the primary riser.
- Available with 8LFF and 12LFF CTO Server models only.

HPE ProLiant Compute DL380 Gen12 2LFF Rear Secondary Drive Cage Kit

P76875-B21

Notes:

- Adds a rear 2LFF drive cage in the secondary rear position in place of the secondary riser.
- Available with 8LFF and 12LFF CTO Server models only.

HPE ProLiant Compute DL380 Gen12 2LFF Rear/Tertiary Drive Cage Kit

P75411-B21

Notes:

- Adds a rear 2LFF drive cage together with the special tertiary-riser arrangement used for LFF rear expansion.
- Available with 8LFF and 12LFF CTO Server models only.

HPE ProLiant Compute DL380 Gen12 4LFF SAS/SATA LP Midplane Drive Cage Kit

P74741-B21

Notes:

- Adds a 4LFF midplane cage above the processors for extra internal LFF storage.
- Available with 8LFF and 12LFF CTO Server models only.
- Requires 1U Heatsink.

3c. Define connectivity for x4-capable drive cages, if applicable

This may apply to configurations such as 8SFF x4 or applicable EDSFF x4 configurations presented in OCA.

These configurations may support both x4 and x2 PCIe connectivity:

- x4 connection: Higher PCIe bandwidth, preferred for performance-sensitive workloads.
- x2 connection: Reduced PCIe bandwidth, used where required by the selected configuration.

Select the appropriate Controller x4 or Controller x2 option based on the desired performance and configuration requirements.

For direct attach configurations, select the applicable Direct Attach FIO Bundle Kit so OCA can add the correct cable kits.

Notes:

- Cable Kits are not part of the Smart Chassis selection.
- After completing your Smart Chassis configuration, set the Smart Chassis quantity to 1. OCA will automatically select the required cables, which will appear under Storage Devices (Step 5) → Internal Storage Controller Cables.
- No manual cable selection is required.

HPE ProLiant Compute DL380 Gen12 8SFF x4 1P Direct Attach FIO Bundle Kit

P78070-B21

Notes:

- Factory bundle that configures a single 8SFF x4 direct-attach storage cage in the 1-processor layout and includes the required high-performance fan kit and cabling.
- Available for SFF CTO Server configurations with 1 or 2 processors.

Bundle components:

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P77489-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2/3 Cable Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Balanced FIO Bundle Kit

P78047-B21

Notes:

- Factory bundle that configures a single 8SFF x4 direct-attach storage cage in balanced 2-processor mode and includes the required high-performance fan kit and cabling.
- Available for SFF CTO Server configurations with 2 processors only.

Bundle components:

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P76462-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2 Cable Kit).

HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Multiple Purpose Cage FIO Bundle Kit

P78058-B21

Notes:

- Factory bundle that configures a single 8SFF x4 direct-attach storage cage with the multi-purpose cage and includes the required high-performance fan kit, front 4EDSFF support, front NS204i-u boot device support, front OCP enablement, and cabling.
- Available for SFF CTO Server configurations with 2 processors only.

Bundle components:

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P76468-B21 (HPE ProLiant Compute DL380 Gen12 Front 8SFF x4 Direct Attach Box 1/3 Cable Kit).
- P76449-B21 (HPE ProLiant Compute DL380 Gen12 Multi-purpose Cage Kit).
- 4EDSFF support: P76450-B21 (HPE ProLiant Compute Gen12 4EDSFF Drive Cage Kit) + P77476-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF Front Cable Kit).
- NS204i-u front boot support: P74759-B21 (HPE ProLiant Compute Gen12 NS204i-u Front Hot Plug Enablement Kit) + one supported HPE NS204i-u V2 Hot Plug Boot Optimized Storage Device.
- Front OCP support: P74757-B21 (HPE ProLiant Compute Gen12 Front Primary OCP Box2 Bay9 Enablement Kit) + P74758-B21 (HPE ProLiant Compute Gen12 Front Secondary OCP Box2 Bay11 Enablement Kit) to enable two front OCP slots.

Configuration Information

HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach UMB Multiple Purpose Cage FIO Bundle Kit P78061-B21

Notes:

- Factory bundle that configures a single 8SFF x4 direct-attach storage cage with the Universal Media Bay and multi-purpose cage, and includes the required high-performance fan kit, front 4EDSFF support, front NS204i-u boot device support, front OCP enablement, and cabling.
- Available for SFF CTO Server configurations with 2 processors only.

Bundle components:

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P76468-B21 (HPE ProLiant Compute DL380 Gen12 Front 8SFF x4 Direct Attach Box 1/3 Cable Kit).
- P74749-B21 (HPE ProLiant Compute DL3XX Gen12 SFF Universal Media Bay Kit).
- P76449-B21 (HPE ProLiant Compute DL380 Gen12 Multi-purpose Cage Kit).
- 4EDSFF support: P76450-B21 (HPE ProLiant Compute Gen12 4EDSFF Drive Cage Kit) + P77476-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF Front Cable Kit).
- NS204i-u front boot support: P74759-B21 (HPE ProLiant Compute Gen12 NS204i-u Front Hot Plug Enablement Kit) + one supported HPE NS204i-u V2 Hot Plug Boot Optimized Storage Device.
- Front OCP support: P74757-B21 (HPE ProLiant Compute Gen12 Front Primary OCP Box2 Bay9 Enablement Kit) + P74758-B21 (HPE ProLiant Compute Gen12 Front Secondary OCP Box2 Bay11 Enablement Kit) to enable two front OCP slots.

HPE ProLiant Compute DL380 Gen12 16SFF x4 Direct Attach Balanced FIO Bundle Kit P77931-B21

Notes:

- Factory bundle that configures two 8SFF x4 direct-attach storage cages in balanced 2-processor mode and includes the required high-performance fan kit and cabling.

Bundle components:

Qty 2:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P77489-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2/3 Cable Kit).
- P76461-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 1/2 for 2 Processors Cable Kit).

HPE ProLiant Compute DL380 Gen12 16SFF x4 Direct Attach Universal Media Bay FIO Bundle Kit P77934-B21

Notes:

- Factory bundle that configures 16SFF x4 direct-attach storage with the Universal Media Bay and includes the required high-performance fan kit and cabling.

Bundle components:

Qty 2:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P74749-B21 (HPE ProLiant Compute DL3XX Gen12 SFF Universal Media Bay Kit).
- P77489-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2/3 Cable Kit).
- P76461-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 1/2 for 2 Processors Cable Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 16SFF x4 Direct Attach Multiple Purpose Cage FIO Bundle Kit

P78064-B21

Notes:

- Factory bundle that configures 16SFF x4 direct-attach storage with the multi-purpose cage, retimer cards, risers, required high-performance fan kit, front support options, and cabling.

Bundle components:

Qty 2:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P25527-B21 (HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P76449-B21 (HPE ProLiant Compute DL380 Gen12 Multi-purpose Cage Kit).
- 4EDSFF support: P76450-B21 (HPE ProLiant Compute Gen12 4EDSFF Drive Cage Kit) + P77476-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF Front Cable Kit).
- NS204i-u front boot support: P74759-B21 (HPE ProLiant Compute Gen12 NS204i-u Front Hot Plug Enablement Kit) + one supported HPE NS204i-u V2 Hot Plug Boot Optimized Storage Device.
- Front OCP support: P74757-B21 (HPE ProLiant Compute Gen12 Front Primary OCP Box2 Bay9 Enablement Kit) + P74758-B21 (HPE ProLiant Compute Gen12 Front Secondary OCP Box2 Bay11 Enablement Kit) to enable two front OCP slots.
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit).
- P48802-B21 (HPE ProLiant DL380 Gen11 2U x8/x16/x8 Secondary Riser Kit).
- P76463-B21 (HPE ProLiant Compute DL380 Gen12 16SFF x4 2x Gen4 Retimer Card Box 1/3 Cable Kit).

HPE ProLiant Compute DL380 Gen12 16SFF x2 1P Direct Attach FIO Bundle Kit

P77955-B21

Notes:

- Factory bundle that configures 16SFF direct-attach storage in x2 connection mode from processor 1 and includes the required high-performance fan kit, drive cages, and cabling.
- Available for SFF CTO Server configurations with 1 or 2 processors.

Bundle components:

Qty 2:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P77486-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x2 Direct Attach Cable Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).

HPE ProLiant Compute DL380 Gen12 16SFF x2 1P Direct Attach Universal Media Bay FIO Bundle Kit

P77958-B21

Notes:

- Factory bundle that configures 16SFF direct-attach storage in x2 connection mode from processor 1 with the Universal Media Bay, and includes the required high-performance fan kit, drive cages, and cabling.
- Available for SFF CTO Server configurations with 1 or 2 processors.

Bundle components:

Qty 2:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P77486-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x2 Direct Attach Cable Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P74749-B21 (HPE ProLiant Compute DL3XX Gen12 SFF Universal Media Bay Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 24SFF x16/x16/x16 OCP Balanced FIO Bundle Kit

P77937-B21

Notes:

- Factory bundle that configures 24SFF x4 direct-attach storage with two Gen4 retimer cards and the associated x16 OCP and riser layout.

Bundle components:

Qty 3:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).

Qty 2:

- P25527-B21 (HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit); Slot 1 unavailable.
- P51083-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit); Slot 4 unavailable.
- Rear OCP x16 support: P72201-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotA x16 Cable Kit) + P72207-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x16 Cable Kit).
- P76463-B21 (HPE ProLiant Compute DL380 Gen12 16SFF x4 2x Gen4 Retimer Card Box 1/3 Cable Kit).
- P76462-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2 Cable Kit).

HPE ProLiant Compute DL380 Gen12 24SFF x16/x16/x16 OCP Gen4 Retimer Card FIO Bundle Kit

P77940-B21

Notes:

- Factory bundle that configures 24SFF x4 direct-attach storage with two processors, x16 OCP support, and one Gen4 retimer card. In this configuration, primary riser slots 1 and 3 are not available.

Bundle components:

Qty 3:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit).
- P48802-B21 (HPE ProLiant DL380 Gen11 2U x8/x16/x8 Secondary Riser Kit).
- P25527-B21 (HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter).
- P77492-B21 (HPE ProLiant Compute DL380 Gen12 16SFF x4 1x Gen4 Retimer Card Box 1/3 Direct Attach Cable Kit).
- P76462-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2 Cable Kit).
- P72201-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotA x16 Cable Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 Tertiary Riser 24SFF x16/x16/x16 OCP Balanced FIO Bundle Kit

P77943-B21

Notes:

- Factory bundle that configures 24SFF x4 direct-attach storage in balanced 2-processor mode with x16 OCP support and two Gen4 retimer cards. In this configuration, primary riser slots 1 and 3 and secondary riser slot 5 are not available.

Bundle components:

Qty 3:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).

Qty 2:

- P25527-B21 (HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit).
- P48802-B21 (HPE ProLiant DL380 Gen11 2U x8/x16/x8 Secondary Riser Kit).
- P76462-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2 Cable Kit).
- P76463-B21 (HPE ProLiant Compute DL380 Gen12 16SFF x4 2x Gen4 Retimer Card Box 1/3 Cable Kit).
- P72201-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotA x16 Cable Kit).
- P72207-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x16 Cable Kit).

HPE ProLiant Compute DL380 Gen12 24SFF x2 Direct Attach x16/x16/x16 OCP FIO Bundle Kit

P77961-B21

Notes:

- Factory bundle that configures 24SFF x2 direct-attach storage with two processors and x16 OCP support. In this configuration, primary riser slot 1 and secondary riser slot 4 operate at x8 bus width.

Bundle components:

Qty 3:

- P75741-B21 (HPE ProLiant Compute DL3XX Gen12 8SFF x4 U.3 Tri-Mode Drive Cage Kit).
- P77486-B21 (HPE ProLiant Compute DL380 Gen12 8SFF x2 Direct Attach Cable Kit).

Qty 2:

- P76471-B21 (HPE ProLiant Compute DL380 Gen12 x16/x16/x16 Cable Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit); Slot 1 with x8 only.
- P51083-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit); Slot 4 with x8 only.
- P72201-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotA x16 Cable Kit).
- P72207-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x16 Cable Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 12EDSFF x16/x16/x16 OCP Direct Attach PCIe FIO Bundle Kit

P77946-B21

Notes:

- Factory bundle that configures 12EDSFF x4 direct-attach storage with two processors and x16 OCP support in an EDSFF CTO Server configuration. In this configuration, primary riser slot 1 and secondary riser slot 4 operate at x8 bus width.

Bundle components:

Qty 2:

- P76471-B21 (HPE ProLiant Compute DL380 Gen12 x16/x16/x16 Cable Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P74738-B21 (HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit).
- P51083-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit).
- P76465-B21 (HPE ProLiant Compute DL380 Gen12 12EDSFF x4 Direct Attach Box 2 Cable Kit).
- P72201-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotA x16 Cable Kit).
- P72207-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x16 Cable Kit).

HPE ProLiant Compute DL380 Gen12 12EDSFF x2 1P Direct Attach x16/x16/x16 PCIe FIO Bundle Kit

P77964-B21

Notes:

- Factory bundle that configures 12EDSFF x2 direct-attach storage from CPU1 in an EDSFF CTO Server configuration. In this configuration, primary riser slot 1 operates at x8 bus width.
- Supported with EDSFF CTO Server configurations only.
- The HPE ProLiant Compute DL380 Gen12 Primary Riser x16 FIO Bundle Kit (P78117-B21) and HPE ProLiant Compute DL380 Gen12 Secondary Riser x16 FIO Bundle Kit (P78120-B21) cannot be selected with this bundle.

Bundle components:

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P74738-B21 (HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit).
- P76471-B21 (HPE ProLiant Compute DL380 Gen12 x16/x16/x16 Cable Kit).
- P76467-B21 (HPE ProLiant Compute DL380 Gen12 12EDSFF x2 Direct Attach Box 1/2 Cable Kit).

HPE ProLiant Compute DL380 Gen12 20EDSFF x4 FIO Bundle Kit

P77949-B21

Notes:

- Factory bundle that configures 20EDSFF x4 direct-attach storage with two processors in an EDSFF CTO Server configuration. In this configuration, OCP A and OCP B operate at x8 bus width.

Bundle components:

Qty 3:

- P74738-B21 (HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P72205-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x8 Cable Kit).
- P76465-B21 (HPE ProLiant Compute DL380 Gen12 12EDSFF x4 Direct Attach Box 2 Cable Kit).
- P77490-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 1 Cable Kit).
- P77491-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 3 Cable Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 12EDSFF x4 Direct Attach Multiple Purpose Cage FIO Bundle Kit P78067-B21

Notes:

- Factory bundle that configures 12EDSFF x4 direct-attach storage with the multi-purpose cage in an EDSFF CTO Server configuration.

Bundle components:

Qty 2:

- P74738-B21 (HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P76449-B21 (HPE ProLiant Compute DL380 Gen12 Multi-purpose Cage Kit).
- P76450-B21 (HPE ProLiant Compute Gen12 4EDSFF Drive Cage Kit).
- P77476-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF Front Cable Kit).
- P48803-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit).
- P51083-B21 (HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit).
- P77490-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 1 Cable Kit).
- P77491-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 3 Cable Kit).
- NS204i-u front boot support: P74759-B21 (HPE ProLiant Compute Gen12 NS204i-u Front Hot Plug Enablement Kit) + P78279-B21 (HPE NS204i-u V2 Hot Plug Boot Optimized Storage Device).
- One front OCP slot: P74757-B21 (HPE ProLiant Compute Gen12 Front Primary OCP Box2 Bay9 Enablement Kit).
- Two front OCP slots: P74757-B21 (HPE ProLiant Compute Gen12 Front Primary OCP Box2 Bay9 Enablement Kit)+ P74758-B21 (HPE ProLiant Compute Gen12 Front Secondary OCP Box2 Bay11 Enablement Kit).

HPE ProLiant Compute DL380 Gen12 36EDSFF x4 Direct Attach x8/x8 OCP SlotA FIO Bundle Kit P77952-B21

Notes:

- Factory bundle that configures 36EDSFF x4 direct-attach storage with two processors and paddle cards in an EDSFF CTO Server configuration. In this configuration, primary, secondary, and tertiary riser slots are not available, and OCP A and OCP B operate at x8 bus width.

Bundle components:

Qty 3:

- P74738-B21 (HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P72205-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x8 Cable Kit).
- P76465-B21 (HPE ProLiant Compute DL380 Gen12 12EDSFF x4 Direct Attach Box 2 Cable Kit).
- P77490-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 1 Cable Kit).
- P77491-B21 (HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 3 Cable Kit).
- P83356-B21 (HPE ProLiant Compute DL380 Gen12 Primary Riser Paddle Card FIO Kit).
- P80997-B21 (HPE ProLiant Compute DL380 Gen12 Secondary Riser Paddle Card FIO Kit).

Configuration Information

HPE ProLiant Compute DL380 Gen12 36EDSFF x2 Direct Attach 2xOCP x8 FIO Bundle Kit

P77967-B21

Notes:

- Factory bundle that configures 36EDSFF x2 direct-attach storage with two processors and OCP x8 support in an EDSFF CTO Server configuration.

Bundle components:**Qty 3:**

- P74738-B21 (HPE ProLiant Compute Gen12 12EDSFF Drive Cage Kit).

Qty 1:

- P48820-B21 (HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit).
- P72205-B21 (HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x8 Cable Kit).

3d. Model-X Component Removal/Replacement Setting**Notes:**

- Select this SKU in the smart chassis section to build drive less configuration with SFF CTO Server.
- Selecting this SKU adds a bay blank instead of a drive cage.

HPE ProLiant Compute DL380 No Drive Configuration FIO Kit

873763-B21

3e. Riser Card(s) and Accessories**Notes:** Refer to the *PCIe Expansion Slot* section above for detailed Riser card and accessory selection guidance.**Riser Cards****Notes:**

- Review the PCIe Expansion Slots section for slot numbering, bus width, processor requirements, and riser configuration details.
- A second processor is required when selecting a secondary or tertiary riser.
- The 3x16 secondary riser and tertiary riser cannot be selected together.

HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit

P48803-B21

HPE ProLiant DL380 Gen11 2U x8/x16/x8 Secondary Riser Kit

P48802-B21

HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit

P51083-B21

HPE ProLiant Compute DL380 Gen12 2U x8/x16 Tertiary Riser Kit

P74737-B21

HPE ProLiant Compute DL380 Gen12 2U 2x16 Tertiary Riser Kit

P76451-B21

Riser Cards Accessories**Notes:** Review the *PCIe Expansion Slots* section for slot enablement details and configuration dependencies.

HPE ProLiant Compute DL380 Gen12 x8 Riser Enablement Cable Kit

P76471-B21

Notes:

- Required cable kit used to enable the top slot on a 3x16 primary or 3x16 secondary riser.
- Select Qty 2 with the applicable primary or secondary riser x16 FIO bundle kit.

HPE ProLiant Compute DL380 Gen12 Primary Riser x16 FIO Bundle Kit

P78117-B21

Notes: Factory Integrated Only bundle used with Qty 2 of P76471-B21 to enable Slot 1 on the 3x16 primary riser at x16 from processor 1.

HPE ProLiant Compute DL380 Gen12 Secondary Riser x16 FIO Bundle Kit

P78120-B21

Notes: Factory Integrated Only bundle used with Qty 2 of P76471-B21 to enable Slot 4 on the 3x16 secondary riser at x16 from processor 2.

Configuration Information

3f. Storage Controller

HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller	P47777-B21
HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller	P47781-B21
HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller	P47785-B21
HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller	P47789-B21
HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	P58335-B21
HPE MR408i-p Gen11 x8 Lanes 4GB Cache PCI SPDM Plug-in Storage Controller	P74775-B21
HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter	P25527-B21
HPE MR932i-p x32 Lanes PCIe Gen5 SPDM Plug-in Storage Controller	P75697-B21

Notes: The MR932i-p controller supports SAS and NVMe SSDs only. It does not support HDDs.

3g. Finalize Smart Chassis Selection

Once configuration is complete, set **Smart Chassis quantity** = 1.

STEP 4: AMBIENT TEMPERATURE**Notes:**

- Only one ambient temperature configuration tracking SKU can be selected.
- Ambient temperature selection may impact the availability of thermally sensitive options, including select GPUs and high-speed networking adapters.
- Selecting a higher ambient temperature may restrict options that are supported only at lower ambient temperature selections.
- Final configuration support must be validated in HPE One Config Advanced.

HPE ProLiant Compute 30C Maximum Recommended Ambient Temperature Configuration Tracking	P79552-B21
HPE ProLiant Compute 27C Maximum Recommended Ambient Temperature Configuration Tracking	P79555-B21
HPE ProLiant Compute 25C Maximum Recommended Ambient Temperature Configuration Tracking	P79558-B21
HPE ProLiant Compute 23C Maximum Recommended Ambient Temperature Configuration Tracking	P79561-B21

STEP 5: STORAGE DEVICES

Smart Storage Battery

Notes:

- Smart storage battery is required when an MR416 or MR408 internal storage controller is selected.
- Smart storage battery is not required with the MR932i-p controller because battery backup is integrated with the controller.
- Max 1 of Smart storage battery can be selected per server.

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit P01366-B21

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit P02377-B21

HPE 16W Smart Hybrid Capacitor with 145mm Cable P65038-B21

Internal Storage Controller Cables

Notes:

- After completing your Smart Chassis configuration, OCA will automatically select the required cables.
- No manual cable selection is required.

HPE ProLiant DL360 Gen11 Storage Controller Enablement Cable Kit P48918-B21

HPE ProLiant Compute DL380 Gen12 8SFF/2SFF UMB OROC Cable Kit P76452-B21

HPE ProLiant Compute DL380 Gen12 8SFF/2SFF UMB PCIe Cable Kit P76453-B21

HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 1 for 2 Processors Cable Kit P76461-B21

HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2 Cable Kit P76462-B21

HPE ProLiant Compute DL380 Gen12 8SFF x4 Direct Attach Box 2/3 for 1P Cable Kit P77489-B21

HPE ProLiant Compute DL380 Gen12 8SFF x2 Direct Attach Cable Kit P77486-B21

HPE ProLiant Compute DL380 Gen12 Front 8SFF x4 Direct Attach Box 1/3 Cable Kit P76468-B21

HPE ProLiant Compute DL380 Gen12 8SFF x4 PCIe for 2 Controllers Box 1/2 Cable Kit P77488-B21

HPE ProLiant Compute DL380 Gen12 8SFF x2 PCIe Box 2 Controller Cable Kit P76456-B21

HPE ProLiant Compute DL380 Gen12 OROC 8SFF x2 Controller Cable Kit P76454-B21

HPE ProLiant Compute DL380 Gen12 16SFF x4 2x Gen4 Retimer Card Box 1/3 Cable Kit P76463-B21

HPE ProLiant Compute DL380 Gen12 36EDSFF x2 Direct Attach Cable Kit P76464-B21

HPE ProLiant Compute DL380 Gen12 12EDSFF x4 Direct Attach Box 2 Cable Kit P76465-B21

HPE ProLiant Compute DL380 Gen12 12EDSFF x2 Direct Attach Box 1/2 Cable Kit P76467-B21

HPE ProLiant Compute DL380 Gen12 8LFF PCIe Controller Box 2/3 Cable Kit P76473-B21

HPE ProLiant Compute DL380 Gen12 8LFF OROC Box 2/3 Cable Kit P76474-B21

HPE ProLiant Compute DL380 Gen12 2SFF x4 PCIe Box 6 Cable Kit P76475-B21

HPE ProLiant Compute DL380 Gen12 2SFF x4 U.3 Side-by-Side Cable Kit P76476-B21

HPE ProLiant Compute DL380 Gen12 8LFF PCIe Box 1/7 Cable Kit P77474-B21

HPE ProLiant Compute DL380 Gen12 8LFF OROC Box 1/7 Cable Kit P77475-B21

HPE ProLiant Compute DL380 Gen12 4EDSFF Front Cable Kit P77476-B21

HPE ProLiant Compute DL380 Gen12 2SFF x4 OROC Box 6 OCP SlotB Cable Kit P77477-B21

HPE ProLiant Compute DL380 Gen12 2SFF HDD Stacking Drive Direct Attach Cable Kit P77478-B21

HPE ProLiant Compute DL380 Gen12 OROC 2SFF U.3 Side-by-Side Cable Kit P77480-B21

HPE ProLiant Compute DL380 Gen12 2SFF U.3 Side-by-Side Direct Attach Cable Kit P77481-B21

HPE ProLiant Compute DL380 Gen12 2SFF Rear PCIe Cable Kit P77482-B21

HPE ProLiant Compute DL380 Gen12 2SFF Rear OROC Cable Kit P77483-B21

Core Options

HPE ProLiant Compute DL380 Gen12 2LFF Rear PCIe Cable Kit	P77484-B21
HPE ProLiant Compute DL380 Gen12 2LFF Rear OROC Cable Kit	P77485-B21
HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 1 Cable Kit	P77490-B21
HPE ProLiant Compute DL380 Gen12 4EDSFF x4 Direct Attach Box 3 Cable Kit	P77491-B21
HPE ProLiant Compute DL380 Gen12 16SFF x4 1x Gen4 Retimer Card Box 1/3 Direct Attach Cable Kit	P77492-B21
HPE ProLiant Compute DL380 Gen12 2SFF x4 Direct Attach Box 6 Cable Kit	P77493-B21
HPE ProLiant DL380/DL560 Gen11 2U GPU Power Cable Kit	P56072-B21
HPE ProLiant Compute DL380 Gen12 Secondary Riser Paddle Card FIO Kit	P80997-B21
HPE ProLiant Compute DL380 Gen12 Primary Riser Paddle Card FIO Kit	P83356-B21

Notes: The Riser Padder Card Kits (P83356-B21 & P83356-B21) are offered to configure up to 36 EDSFF drives as x4 direct attach.

HPE ProLiant Compute DL380 Gen12 MR932i-p 8SFF x4 Cable Kit	P83800-B21
HPE ProLiant Compute DL380 Gen12 MR932i-p 8SFF x2 Cable Kit	P83801-B21
HPE ProLiant Compute DL380 Gen12 MR932i-p 8SFF x1 Cable Kit	P84481-B21
HPE ProLiant Compute DL380 Gen12 12EDSFF Power Cable Kit	P87968-B21
HPE ProLiant Compute DL380 Gen12 MR932i-p 4EDSFF x4 Signal Cable Kit	P83798-B21
HPE ProLiant Compute DL380 Gen12 MR932i-p 4EDSFF x2 Signal Cable Kit	P83799-B21
HPE ProLiant Compute DL380 Gen12 MR932i-p Rear 2SFF Box 4/5 Cable Kit	P87235-B21
HPE ProLiant Compute DL380 Gen12 MR932i-p Rear 2SFF Box 6 Cable Kit	P87236-B21
HPE ProLiant Compute DL380 Gen12 12EDSFF Controller Attach Rear GPU FIO Bundle Kit	P87692-B21

Hard Disk Drives

Mission Critical – 12G SAS – SFF Drives

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3yr Wty 512e FIPS 140-2 TAA-compliant HDD	P28618-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3yr Wty FIPS 140-2 TAA-compliant HDD	P28622-B21
HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P28352-B21
HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P53562-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P28586-B21
HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P53561-B21
HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P40430-B21

Business Critical – 12G SAS – LFF Drives

HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833928-B21
HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834031-B21
HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861746-B21
HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881781-B21
HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23608-B21
HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53553-B21
HPE 24TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P68583-B21
HPE 26TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P80577-B21

Core Options

Business Critical – 6G SATA – LFF Drives

HPE 26TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P80578-B21
HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53554-B21
HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23449-B21
HPE 24TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P68585-B21

Solid State Drives

Notes: For SSD selection guidance, please visit <https://ssd.hpe.com/>

Read Intensive – NVMe – EDSFF – Solid State Drives

HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 Self-encrypting 7600 SSD	P87719-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 Self-encrypting 7600 SSD	P87721-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 Self-encrypting 7600 SSD	P87723-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85121-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85124-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85126-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85128-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin PQC27 CM9 SSD	P85739-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin PQC27 CM9 SSD	P85741-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin PQC27 CM9 SSD	P85743-B21
HPE 30.72TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin PQC27 CM9 SSD	P85745-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91090-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91092-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91094-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91096-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91229-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91231-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3.S EC1 E3 Thin Multi Vendor SSD	P91233-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PM9D3a SSD	P78914-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PM9D3a SSD	P78921-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PM9D3a SSD	P78917-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PM9D3a SSD	P78919-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 Self-encrypting 7600 SSD	P87719-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 Self-encrypting 7600 SSD	P87721-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 Self-encrypting 7600 SSD	P87723-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85121-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85124-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85126-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 SPDM 7600 SSD	P85128-B21
HPE 30.72TB NVMe Gen5 High Performance Read Intensive E3.S EC1 EDSFF SPDM 9550 SSD	P79965-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61187-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57807-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61183-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61179-B21

Core Options

HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57799-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70392-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69234-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77269-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77271-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77275-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70395-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70397-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69546-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70674-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P79122-B21

Mixed Use – NVMe – EDSFF – Solid State Drives

HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 SPDM 7600 SSD	P85114-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 SPDM 7600 SSD	P85117-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 SPDM 7600 SSD	P85119-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 Self-encrypting 7600 SSD	P87715-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 Self-encrypting 7600 SSD	P87717-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3.S EC1 E3 Thin PQC27 CM9 SSD	P85731-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3.S EC1 E3 Thin PQC27 CM9 SSD	P85733-B21
HPE 12.8TB NVMe Gen5 High Performance Mixed Use E3.S EC1 E3 Thin PQC27 CM9 SSD	P85735-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 E3 Thin Multi Vendor SSD	P91084-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 E3 Thin Multi Vendor SSD	P91086-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 E3 Thin Multi Vendor SSD	P91088-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3.S EC1 E3 Thin Multi Vendor SSD	P91098-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3.S EC1 E3 Thin Multi Vendor SSD	P91100-B21
HPE 12.8TB NVMe Gen5 High Performance Mixed Use E3.S EC1 E3 Thin Multi Vendor SSD	P91102-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 Self-encrypting 7600 SSD	P87715-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3.S EC1 Self-encrypting 7600 SSD	P87717-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 SPDM 7600 SSD	P85114-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 SPDM 7600 SSD	P85117-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 SPDM 7600 SSD	P85119-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3.S EC1 PM1755 SSD	P78784-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3.S EC1 PM1755 SSD	P78787-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70399-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61191-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69241-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77262-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77265-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77267-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70401-B21
HPE 12.8TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70403-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69243-B21

Core Options

HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69245-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70672-B21

Read Intensive – SAS – SFF – Solid State Drives

HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-3 PM7 SSD	P83347-B21
HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49045-B21
HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49041-B21
HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49035-B21
HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49031-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21
HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40509-B21
HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40508-B21
HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40507-B21
HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40506-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21

Mixed Use –SAS – SFF – Solid State Drives

HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-3 PM7 SSD	P83344-B21
HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49057-B21
HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49053-B21
HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49049-B21
HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49047-B21

Mixed Use – 12G SAS – SFF – Solid State Drives

HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40512-B21
HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40511-B21
HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40510-B21

Read Intensive – 6G SATA – SFF – Solid State Drives

HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40501-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40500-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B21
HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58236-B21
HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40497-B21
HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B21
HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40496-B21

Mixed Use – 6G SATA – SFF – Solid State Drives

HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40505-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40504-B21
HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58244-B21
HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40503-B21
HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40502-B21

Core Options

Mixed Use – 12G SAS – LFF –Solid State Drives

HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	P37009-B21
--	------------

Read Intensive – 6G SATA – LFF – Solid State Drives

HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	P47808-B21
---	------------

Read Intensive – NVMe – SFF – Solid State Drives

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PQC27 CM9 SSD	P85668-B21
---	------------

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PQC27 CM9 SSD	P85670-B21
---	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PQC27 CM9 SSD	P85672-B21
---	------------

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PQC27 CM9 SSD	P85674-B21
--	------------

HPE 30.72TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PQC27 CM9 SSD	P85676-B21
--	------------

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Multi Vendor SSD	P91243-B21
--	------------

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Multi Vendor SSD	P91245-B21
--	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Multi Vendor SSD	P91247-B21
--	------------

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Multi Vendor SSD	P91249-B21
---	------------

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Static PM1753 SSD	P78806-B21
---	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Static PM1753 SSD	P78808-B21
---	------------

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Static PM1753 SSD	P78810-B21
--	------------

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70436-B21
---	------------

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63841-B21
--	------------

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-B21
--	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70434-B21
--	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63837-B21
---	------------

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64848-B21
--	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-B21
---	------------

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63833-B21
---	------------

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64846-B21
--	------------

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-B21
---	------------

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61019-B21
--	------------

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61027-B21
--	------------

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61035-B21
--	------------

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500 SSD	P84242-B21
---	------------

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500 SSD	P84244-B21
---	------------

HPE 15.36TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500b SSD	P84239-B21
---	------------

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500 SSD	P84242-B21
---	------------

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500 SSD	P84244-B21
---	------------

Mixed Use – NVMe – SFF – Solid State Drives

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PQC27 CM9 SSD	P85662-B21
---	------------

HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PQC27 CM9 SSD	P85664-B21
---	------------

HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PQC27 CM9 SSD	P85666-B21
---	------------

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61043-B21
--	------------

Core Options

HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61051-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61059-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Static PM1755 SSD	P78801-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Static PM1755 SSD	P78804-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P64999-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Multi Vendor SSD	P91237-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Multi Vendor SSD	P91239-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Multi Vendor SSD	P91241-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70428-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63853-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65023-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70426-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63849-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63845-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-B21

VRO – NVMe – SFF – Solid State Drives

HPE 3.84TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P63930-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P63934-B21
HPE 15.36TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P63938-B21
HPE 30.72TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P79065-B21

Optical Drive**Notes:**

- Internal optical drives are supported with SFF CTO Server and 8LFF CTO Server configurations only.
- For SFF CTO Server configurations, the Universal Media Bay Kit (P74749-B21), and the Optical Disk Drive USB to SATA Signal Cable Kit (P72199-B21), are required when an internal optical drive is selected.
- For 8LFF CTO Server configurations, the LFF ODD/DisplayPort Enablement Kit (P74752-B21), and the Optical Disk Drive USB to SATA Signal Cable Kit (P72199-B21), are required when an internal optical drive is selected.
- Internal optical drives are not supported with 24SFF, 12LFF, or EDSFF CTO Server configurations.

HPE 9.5mm SATA DVD-ROM Optical Drive	726536-B21
HPE 9.5mm SATA DVD-RW Optical Drive	726537-B21
HPE Mobile USB DVD-RW Optical Drive	701498-B21

Notes:

- Supported as an external USB optical drive only.
- Connects through server USB ports.

Optical Drive Accessories

HPE ProLiant Compute Gen12 Optical Disk Drive USB to SATA Signal Cable Kit	P72199-B21
--	------------

Notes: Required when an internal optical drive is selected with supported SFF CTO Server or 8LFF CTO Server configurations.

HPE ProLiant Compute Gen12 LFF ODD/Display Port Enablement Kit	P74752-B21
--	------------

Notes:

- Enables internal optical drive support and front DisplayPort support for 8LFF CTO Server configurations.
- Supported with 8LFF CTO Server configurations only.

Core Options

HDD Blank Kit

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

Notes: Blank filler used to cover an unused SFF drive bay and maintain proper airflow.

HPE Gen9 LFF HDD Spade Blank Kit 807878-B21

Notes: Blank filler used to cover an unused SFF drive bay and maintain proper airflow.

Boot Controllers

HPE NS204i-u v2 480GB NVMe Hot Plug Boot Optimized Storage Device P78279-B21

HPE NS204i-u v2 960GB NVMe Hot Plug Boot Optimized Storage Device P81160-B21

HPE NS204i-u v2 960GB NVMe SED Hot Plug Boot Optimized Storage Device P81162-B21

HPE ProLiant Compute DL380 Gen12 NS204i-u Rear Boot Device Enablement Kit P74755-B21

Notes: Enables rear installation of the NS204i-u boot device above the power supplies.

HPE ProLiant Compute DL380 Gen12 NS204i-u Rear Hot Plug FIO Enablement Kit P77928-B21

Notes: Factory Integrated Only (FIO) option to remove the rear NS204 metal cover so a rear-mounted NS204i-u is externally accessible from the back of the server.

HPE ProLiant Compute Gen12 NS204i-u Front Enablement Kit P74759-B21

Notes: Enables front installation of the NS204i-u boot device in the multipurpose cage; use this when NS204 is fitted in the front.

Virtual RAID

Intel Virtual RAID on CPU Premium FIO Software for HPE R7J57A

Intel Virtual RAID on CPU RAID 1 FIO Software for HPE S3Q19A

Factory Configuration Settings**Complex Configuration (Drive Cage Box Placement FIO Settings)****Notes:**

- These Factory Integrated Only (FIO) settings are used to change the default factory drive cage installation location for selected CTO server configurations.
- Drive cage placement may affect support for high thermal PCIe options, including select GPUs and accelerators, when high thermal drives are installed in a drive box located behind the intended riser location.
- Riser thermal support is configuration dependent and may vary by drive cage location, installed drive type, processor TDP, cooling configuration, riser location, and ambient temperature selection.
- Select the appropriate Drive Cage Box Placement FIO setting when an alternate drive cage location is required to support the intended PCIe riser configuration.

HPE ProLiant Compute DL380 Gen12 16SFF Controller Attach GPU/AOC NIC Box 1/2 FIO Bundle Kit P79308-B21

Notes:

- Supported with SFF CTO Server only.
- Enables factory installation of the 16SFF drive cage in Box 1 and Box 2.
- Default 16SFF drive cage installation is Box 3 first, followed by Box 2.
- This setting may be used when alternate drive cage placement is required for thermal validation of selected high thermal PCIe options

Core Options

HPE ProLiant Compute DL380 G12 8SFF Multi-purpose Cage Cntrl Attach GPU/AOC NIC Box 1 FIO Bundle Kit P79311-B21

Notes:

- Supported with SFF CTO Server only.
- Enables factory installation of the 8SFF drive cage in Box 1.
- Default 8SFF drive cage installation is Box 3.
- This setting may be used when alternate drive cage placement is required for thermal validation of selected high thermal PCIe options.

HPE ProLiant Compute DL380 Gen12 8SFF Controller Attach GPU/AOC NIC Box 2 FIO Bundle Kit P79314-B21

Notes:

- Supported with SFF CTO Server only.
- Enables factory installation of the 8SFF drive cage in Box 2.
- Default 8SFF drive cage installation is Box 3.
- This setting may be used when alternate drive cage placement is required for thermal validation of selected high thermal PCIe options.

HPE ProLiant Compute DL380 Gen12 12EDSFF Controller Attach Rear GPU FIO Bundle Kit P87692-B21

Notes:

- Supported with EDSFF CTO Server only.
- Enables factory installation of the 12EDSFF drive cage in Box 3.
- Default 12EDSFF drive cage installation is Box 2.
- This setting may be used when alternate drive cage placement is required for thermal validation of selected high thermal PCIe options.

STEP 6: NETWORKING**PCIe Networking****1 Gigabit Ethernet adapters**

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE P51178-B21

10 Gigabit Ethernet adapters

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE P26253-B21

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE P26259-B21

10/25 Gigabit Ethernet adapters

AMD Solarflare X4522-PLUS 10/25GbE 2-port SFP56 Adapter for HPE P87940-B21

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE P26262-B21

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE P26264-B21

NVIDIA Ethernet 10/25Gb 2-port SFP28 NVMe-oF Crypto Adapter for HPE S2A69A

Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE P08443-B21

Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE P08458-B21

Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE P21109-B21

Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE P42044-B21

100 Gigabit Ethernet Adapters

Broadcom BCM57608 Ethernet 100Gb 2-port QSFP112 Adapter for HPE P73111-B21

Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE P25960-B21

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE P21112-B21

Core Options

Storage Offload Adapters

NVIDIA Ethernet 100Gb 2-port NVMe-oF Offload Adapter for HPE

R8M41A

HPE InfiniBand & Ethernet

HPE InfiniBand NDR/Ethernet 400Gb 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Generic Adapter P45641-H24

HPE InfiniBand NDR200/Ethernet 200Gb 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Generic Adapter P45642-H23

HPE InfiniBand NDR200/Ethernet 200Gb 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Generic Adapter P45642-H23

HPE InfiniBand NDR200/Ethernet 200GbE 2-port QSFP112 PCIe5 x16 MCX755106AC-HEAT Adapter P65333-H21

HPE InfiniBand XDR400/Ethernet 400GbE 2-port QSFP112 PCIe6 x16 HHHL CX8 Crypto Adapter P79115-H21

HPE InfiniBand XDR/Ethernet 2x400GbE 1-port OSFP PCIe6 x16 HHHL CX8 Crypto Adapter P79114-H21

HPE InfiniBand XDR PCIe Gen6 x16 Multi Host/Socket Direct Auxiliary Card with 250mm MCIO Cable Kit P81264-H21

OCP Networking**1 Gigabit Ethernet adapters**

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE P51181-B21

Intel E610-IT4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE P79833-B21

10 Gigabit Ethernet adapters

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE P10097-B21

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE P26256-B21

Intel E610-IT4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE P79833-B21

10/25 Gigabit Ethernet adapters

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P10115-B21

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE P26269-B21

Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P10106-B21

Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE P41614-B21

Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P42041-B21

100 Gigabit Ethernet adapters

Broadcom BCM57608 Ethernet 100Gb 2-port QSFP112 OCP3 Adapter for HPE P73114-B21

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE P22767-B21

OCP 3.0 Enablement**Notes:**

- Rear OCP Slot A is supported by default at x8. Select the applicable cable kit to enable rear OCP Slot A at x16.
- Rear OCP Slot B requires an enablement cable kit. Select the applicable cable kit based on the desired bus width and processor lane source.
- Cable kits using processor 2 require a 2-processor configuration.
- Front OCP enablement kits are used with the multi-purpose cage to enable front OCP NIC support.

HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotA x16 Cable Kit P72201-B21

Notes: Enables rear OCP Slot A at x16 using PCIe lanes from processor 1.

HPE ProLiant Compute DL3XX/ML350 Gen12 CPU1 to Rear OCP SlotB x8 Cable Kit P72203-B21

Notes: Enables rear OCP Slot B at x8 using PCIe lanes from processor 1.

Core Options

HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x8 Cable Kit

P72205-B21

Notes:

- Enables rear OCP Slot B at x8 using PCIe lanes from processor 2.
- Requires a 2-processor configuration.

HPE ProLiant Compute DL3XX/ML350 Gen12 CPU2 to Rear OCP SlotB x16 Cable Kit

P72207-B21

Notes:

- Enables rear OCP Slot B at x16 using PCIe lanes from processor 2.
- Requires a 2-processor configuration.

HPE ProLiant Compute Gen12 Front Primary OCP Box2 Bay9 Enablement Kit

P74757-B21

Notes:

- Enables the front primary OCP NIC slot of the multi-purpose cage.
- Used when front OCP NIC support is required instead of the rear OCP Slot A position.

HPE ProLiant Compute Gen12 Front Secondary OCP Box2 Bay11 Enablement Kit

P74758-B21

Notes:

- Enables the front secondary OCP NIC slot of the multi-purpose cage.
- Requires the Front Primary OCP Box2 Bay9 Enablement Kit (P74757-B21).

STEP 7: OTHER OPTIONS**Graphic Options (GPU)****Notes:**

- Mixing of GPUs is not allowed
- GPU and rear drive options cannot be selected together.

Full Height Full Length / Double Wide

NVIDIA H200 NVL 141GB PCIe Accelerator for HPE

S3U30C

Notes:

- Maximum quantity 2 (subject to slot/thermal rules).
- Supported with power capped at 450W.
- 1U High Performance Heat Sink (P74787-B21) and GPU cooling upgrade kit (P81130-B21) must be selected.
- Qty-2 of HPE GPU 16-pin Power Cable Kit (P93055-B21) must be selected which can support up to 2 GPUs (1 cable per GPU).
- Maximum ambient temperature support = 27C (subject to slot/quantity rules).

NVIDIA RTX PRO 6000 Blackwell Server Edition 96GB PCIe Accelerator for HPE

S6A73C

Notes:

- Maximum quantity 3 (subject to slot/thermal rules).
- Supported with power capped at 450W.
- 1U High Performance Heat Sink (P74787-B21) and GPU cooling upgrade kit (P81130-B21) must be selected.
- Qty-1 of HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected which can support up to 3 DW GPUs.
- Maximum ambient temperature support = 27C (subject to slot/quantity rules).

Core Options

NVIDIA RTX PRO 6000D 84GB PCIe Accelerator for HPE

S6W21C

Notes:

- Maximum quantity 3 (subject to slot/thermal rules).
- Supported with power capped at 450W.
- 1U High Performance Heat Sink (P74787-B21) and GPU cooling upgrade kit (P81130-B21) must be selected
- Qty-1 of HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected which can support up to 3 DW GPUs.
- Maximum ambient temperature support = 27C (subject to slot/quantity rules).

NVIDIA L40S 48GB PCIe Accelerator

S2L70C

Notes:

- Maximum quantity 3 (subject to slot/thermal rules)
- High Performance Heat Sink OR DLC Module must be selected
- Qty-1 of HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected which can support up to 3 DW GPUs.

GPU Cooling Upgrade

HPE ProLiant Compute DL380 Gen12 GPU Cooling Upgrade Enablement Kit

P81130-B21

Notes: The DL380 GPU Cooling Upgrade Enablement Kit (P81130-B21) is designed to provide enhanced cooling for Double Wide GPUs. It allows GPUs to operate at higher ambient temperatures or supports more drives at the same temperatures as previously offered. The kit includes six additional fans and air baffles. It is compatible with processors up to 270W at 30C or 350W at 27C. The only heat sink supported with it is the 1U high-performance heat sink kit (P74787-B21).

Full Height Full Length / Single Wide

NVIDIA RTX PRO 4500 Blackwell Server Edition 32GB PCIe Accelerator for HPE

S6W30C

Notes: Maximum of 5 (subject to slot/thermal rules) Qty-2 of HPE DL380 Gen11 2U 8p GPU Power Cable Kit (P77896-B21) must be selected which can support up to 5 GPUs (1 cable per 3 GPUs)

Half Height Half Length / Single Wide

NVIDIA L4 24GB PCIe Accelerator for HPE

S0K89C

NVIDIA RTX A1000 8GB PCIe Accelerator for HPE

S5T74C

Notes: Maximum quantity 8 of single wide GPUs can be supported.

Fibre Channel HBAs**Emulex Fibre Channel HBAs**

HPE SN1620E 32Gb 2p FC SecureHBA

S4S01A

HPE SN1720E 64Gb 2p FC SecureHBA

S4T09A

QLogic Fibre Channel HBAs

HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter

R2E08A

HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter

R2E09A

HPE SN1700Q 64Gb 1-port Fibre Channel Host Bus Adapter

R7N86A

HPE SN1700Q 64Gb 2-port Fibre Channel Host Bus Adapter

R7N87A

For the complete range of tape drives, autoloaders, libraries and media refer to:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products

<https://www.hpe.com/storage/BURACompatibility>

Core Options

Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Compute Gen12 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

The product configurator will guide you in selecting the appropriate type and quantity of power cords based on the destination country, power supply type, and quantity. If a different standalone power cord is required, please check the [ProLiant Power Cables](#) web page.

To select the right size power supply for your ProLiant Server it is highly recommended to use "HPE Power Advisor" located at <https://poweradvisorex.it.hpe.com/>

For information on power specifications and technical content visit: [HPE Server power supplies](#).

European Union ErP Lot 9 Regulation

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, Ireland, Switzerland or Turkey, must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

Notes:

- The mixing of 2 different power supplies is NOT allowed.
- Select a minimum (1) and a maximum (2) power supplies.
- 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).
- HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit requires selection of HPE 1600W DC PSU power lug option kit OR HPE 1600W DC PSU Power Cable Kit.

HPE Flex Slot Power Supplies

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21
HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P03178-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38997-B21
HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit	P44712-B21
HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit	P17023-B21
HPE 1600W -48VDC Power Cable Lug Kit	P36877-B21

Notes: Provides the DC power lug hardware for connecting the 1600W -48VDC PSU to customer-supplied DC power cables, used instead of the 1600W DC power cable kit.

Fan Kits**Notes:**

- Maximum Qty=1.
- High Performance Fan Kit and Standard Fan Kit cannot be selected together.
- SFF and 8LFF CTO models include 4 standard fans.
- 12LFF and EDSFF CTO models include 6 standard fans.
- 24SFF CTO models include 6 standard high-performance fans
- CTO Server configurations automatically select the required fan configuration for higher-TDP processors and thermally demanding options, including NVMe direct attach bundles, GPUs, and high-speed NICs.

HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit	P48820-B21
--	------------

Notes: Includes 6 High Performance Fans

Core Options

HPE ProLiant DL380 Gen11 Standard Fan Kit

P49146-B21

Notes: Includes 2 Standard Fans**HPE Security Options**

HPE Trusted Supply Chain for HPE ProLiant

P36394-B21

Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option ensures it is built in the USA in a secure facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant Compute DL380 Gen12 is re-branded as a HPE ProLiant Compute DL380T Gen12 to denote the HPE Trusted Supply Chain security enhancements. The DL380T Gen12 is Trade Agreement Act (TAA) compliant. Learn more at <https://www.hpe.com/security>
- This option requires the selection of HPE Intrusion Detection Kit (P48922-B21)
- This option requires the selection of HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features (BD505A).

HPE iLO Common Password FIO Setting

P08040-B21

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services.

HPE ProLiant Platform Certificate and IDevID iLO FIO Setting

P42104-B21

Notes:

- Initial Device Identity (IDevID) certificates are part of a Zero Trust Architecture. This SKU instructs factory to provision IDevID on HPE iLO.
- Directs HPE manufacturing site to create, digitally sign and store a platform certificate on the server.
- Requires HPE Trusted Platform Module (TPM).

HPE Bezel Lock Kit

875519-B21

Notes:

- Maximum quantity = 1.
- Requires selection of HPE Gen11 2U Bezel Kit (P50400-B21) is selected.

HPE Gen11 2U Bezel Kit

P50400-B21

HPE ProLiant DL3XX Gen11 Intrusion Cable Kit

P48922-B21

Notes: This option must be selected if HPE Trusted Supply Chain SKU (P36394-B21) is selected.

HPE OEM Gen11 2U Bezel KIT

P55441-B21

Notes: Requires selection of HPE Gen11 2U Bezel Kit (P50400-B21) is selected.

Core Options

Software as a Service Management

HPE Compute Ops Management

HPE Compute Ops Management Standard with ProLiant Enablement	S2R34AAE
HPE Compute Ops Management Standard 3-year Upfront ProLiant SaaS	R7A11AAE
HPE Compute Cloud Management Server FIO Enablement	S1A05A
HPE Compute Ops Management Standard 5-year Upfront ProLiant SaaS	R7A12AAE
HPE Compute Ops Management Standard 7-year Upfront ProLiant SaaS	S2E10AAE
HPE Compute Ops Management Advanced Flex with ProLiant Enablement	S6C28AAE
HPE Compute Ops Management Advanced 1-year Upfront ProLiant SaaS	S5E58AAE
HPE Compute Ops Management Advanced 3-year Upfront ProLiant SaaS	S5E59AAE
HPE Compute Ops Management Advanced 5-year Upfront ProLiant SaaS	S5E60AAE
HPE Compute Ops Management Advanced 7-year Upfront ProLiant SaaS	S5E61AAE

HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Notes: For customers purchasing HPE Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

For more information, visit the HPE Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

Supported Servers – CTO only. No OEM. – Complete list can be found here: Latest Supported Server List:

<https://www.hpe.com/info/com-supported-servers>

Management Hardware

HPE ProLiant DL380/DL560 Gen11 2U Rear Serial Port Cable Kit	P48824-B21
HPE ProLiant Compute DL380 Gen12 System Insight Display Kit	P74748-B21

Additional Options

Embedded Management

HPE iLO Common Password FIO Setting

HPE iLO Common Password FIO Setting

P08040-B21

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services.

HPE iLO Advanced

HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE

HPE Converged Infrastructure Management Software

HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView including 3yr 24x7 Support Track 1-server LTU	E5Y36A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support Bundle Track 1-server LTU	E5Y44A

Notes: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be [downloaded](#).

HPE Racks

- Refer to the HPE Advanced Series Racks QuickSpecs for information on additional racks options and rack specifications. [HPE G2 Advanced Series Racks](#)
- Refer to the HPE Enterprise Series Racks QuickSpecs for information on additional racks options and rack specifications. [HPE G2 Enterprise Series Racks](#)

HPE Power Distribution Units (PDUs)

- Refer to the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Refer to the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Refer to the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Refer to the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

Additional Options

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Refer to the [HPE Direct Flow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Refer to the [HPE Line Interactive Single-Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Rack Options

Refer to the [HPE KVM Switches web page](#) for information on these products and their specifications.

Easy Install Rail Kits

Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative.

Notes:

- Hewlett Packard Enterprise recommends that a minimum of two people is required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.
- HPE rail kits are designed to work with HPE racks in compliance with industry standard EIA-310-E. In the event a customer elects to purchase a third-party rack for use with an HPE rail kit, any such use is at the customer's own risk. HPE makes no express or implied warranties with respect to such third-party racks and specifically disclaims any implied warranties of merchantability and fitness for a particular purpose. Furthermore, HPE has no obligation and assumes no liability for the materials, design, specifications, installation, safety, and compatibility of any such third-party racks with any rail kits, including HPE rail kits.

HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit

P52341-B21

Notes: Does not include Cable Management Arm (CMA) (P70744-B21).

HPE ProLiant Compute DL3XX Gen12 2U Cable Management Arm for Rail Kit

P70744-B21

HPE Support Services

Installation & Startup Services

HPE ProLiant DL/ML Install Service

U4554E

HPE ProLiant DL/ML Startup Service

U4555E

Tech Care Services

HPE 3 Year Tech Care Essential DL380 Gen12 HW Service

H49RRE

HPE 3 Year Tech Care Essential wDMR DL380 Gen12 HW Service

H49RSE

HPE 5 Year Tech Care Essential DL380 Gen12 HW Service

H49SWE

HPE 5 Year Tech Care Essential wDMR DL380 Gen12 HW Service

H49SXE

Notes: For a full listing of support services available for this server, please visit <https://www.hpe.com/services>.

Technical Specifications

System Unit

Dimensions (height x width x depth)

- **SFF/EDSFF CTO servers:**
8.75 x 44.80 x 72.70 cm / 3.44 x 17.64 x 28.62 in.
- **LFF CTO servers:**
8.75 x 44.80 x 73.25 cm / 3.44 x 17.64 x 28.84 in.

Notes: The depth is measured from the back of the front ear to rear IO wall surface, does not include PSUs.

Weight (approximate)

- **SFF**
 - **Maximum:** 33 kg / 72.75 lbs.
 - **Minimum:** 18 kg / 39.68 lbs.
- **LFF**
 - **Maximum:** 37 kg / 81.57 lbs.
 - **Minimum:** 23 kg / 50.70 lbs.

System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft.) above sea level to a maximum of 3050 m (10,000 ft.), no direct sustained sunlight. Maximum rate of change is 20°C/hr. (36°F/hr.). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft.) above 900 m (2953 ft.) to a maximum of 3050 m (10,000 ft.). The approved hardware configurations for this system are listed at the URL: <https://www.hpe.com/support/ASHRAEGen12>

- For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft.) above 900 m (2953 ft.) to a maximum of 3050 m (10,000 ft.). The approved hardware configurations for this system are listed at the URL: <https://www.hpe.com/support/ASHRAEGen12>
- System performance may be reduced if operating in the extended ambient operating range or with a fan fault.
- **Non-operating**
-30° to 60°C (-22° to 140°F). The maximum rate of change is 20°C/hr. (36°F/hr.).

Technical Specifications

Relative Humidity (non-condensing)

- **Operating**
8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.
- **Non-operating**
5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**
3050 m (10,000 ft.). This value may be limited by the type and number of options installed. The maximum allowable altitude change rate is 457 m/min (1500 ft./min).
 - **Non-operating**
9144 m (30,000 ft.). Maximum allowable altitude change rate is 457 m/min (1500 ft./min).
-

Technical Specifications

Acoustic Noise

Listed are the declared mean A-Weighted sound power levels (LWA,m), declared average bystander position A-Weighted sound pressure levels (LpAm) and the statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LWA,m when the product is operating in a 23± 2°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Acoustic Noise	
Idle	
LwA,m	4.2 B Entry – SFF 4.7 B Medium - SFF 5.7 B Performance – SFF 5.6 B Base - EDSFF 5.9 B Dense - LFF
LpAm	28 dBA Entry – SFF 32 dBA Medium - SFF 44 dBA Performance – SFF 45 dBA Base - EDSFF 48 dBA Dense - LFF
Kv	0.4 B Entry – SFF 0.4 B Medium - SFF 0.4 B Performance – SFF 0.4 B Base - EDSFF 0.4 B Dense - LFF
Operating	
LWA,m	4.2 B Entry – SFF 5.5 B Medium - SFF 5.7 B Performance – SFF 5.6 B Base - EDSFF 6.0 B Dense - LFF
LpAm	28 dBA Entry – SFF 41 dBA Medium - SFF 44 dBA Performance – SFF 45 dBA Base - EDSFF 49 dBA Dense - LFF
Kv	0.4 B Entry – SFF 0.4 B Medium - SFF 0.4 B Performance – SFF 0.4 B Base - EDSFF 0.4 B Dense - LFF

Technical Specifications

Notes:

- All measurements were made to conform to ISO 7779 / ECMA-74 and declared to conform to ISO 9296 / ECMA-109. Operating mode is represented by 50% of CPU and GPU TDP.
 - The results in this declaration apply only to the specific configuration listed below when operating and tested according to the indicated modes and standards. A system with additional configuration components or increased operating functionality may increase the noise emission values.
 - Entry – SFF Configuration: 1x Intel® GNR-SP 6507P CPU, 2x SAS 10K SFF BC HDD, 1x 32GB DIMM, 1x 800W PSU, 4x STD fan, 1x 1Gb 4p BASE-T OCP Adapter, 1x MR416i-p PCIe.
 - Medium – SFF Configuration: 2x Intel® GNR-SP 6517P CPU, 8x SAS 10K SFF BC HDD, 2x 32GB DIMM, 2x 800W PSU, 6x STD fan, 2x 1Gb 4p BASE-T OCP Adapter, 1x MR416i-p PCIe.
 - Performance – SFF Configuration: 2x Intel® Xeon® 6530P CPU, 8x NVMe PCIe SSD U.3, 8x 32GB DIMM, 2x 800W PSU, 6x Perf fan, 2x 10/25GbE 2p SFP28 OCP3 Adapter, 1x MR416i-p PCIe, 1x Gen12 Hot Plug Boot Opt. Dev.
 - Base – EDSFF Configuration: 2x Intel® Xeon® 6530P CPU, 8x PCIe ED SSD E3.S, 8x 64GB DIMM, 2x 800W PSU, 6x Perf fan, 1x 10/25GbE 2p SFP28 OCP3 Adapter, 1x Gen12 Hot Plug Boot Opt. Dev.
 - Dense - LFF Configuration: 2x Intel® Xeon® 6730P CPU, 12x SAS 7.2K SFF BC HDD, 8x 32GB DIMM, 2x 800W PSU, 6x Perf fan, 1x 1Gb 4p BASE-T OCP Adapter, 1x MR216i-p PCIe.
 - The declared mean A-weighted sound power level, LWA,m, is computed as the arithmetic average of the measured.
 - A-weighted sound power levels for a randomly selected sample, rounded to the nearest 0,1 B.
 - The declared mean A-weighted emission sound pressure level, LpAm, is computed as the arithmetic average of the measured A-weighted emission sound pressure levels at the bystander positions for a randomly selected sample, rounded to the nearest 1 dB.
 - The statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LWA,m, such that there will be a 95% probability of acceptance, when using the verification procedures of ISO 9296, if no more than 6,5 % of the batch of new equipment, has A-weighted sound power levels greater than (LWA,m + Kv).
 - The quantity, LWA,c (formerly called LWAd), can be computed from the sum of LWA,m and Kv.
 - B, dB, abbreviations for bels and decibels, respectively, where 1 B = 10 dB.
 - Systems under abnormal conditions may increase the noise level, people in the vicinity of the product [cabinet] for extended periods of time should consider wearing hearing protection or using other means to reduce noise exposure.
-

Technical Specifications

Emissions Classification (EMC) – Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett Packard Enterprise offers [end-of-life product return, trade-in, and recycling programs](#), in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
06-Jul-2026	Version 17	Changed	Overview, Core Options
		Added	OCP 3.0 enablement rules, Mixed Use - NVMe – EDSFF E3.S 1T, Read Intensive – NVMe - EDSFF E3.S 1T,
		Removed	Obsolete SKUs. Read Intensive – SAS – SFF – Solid State Drives Mixed Use –SAS – SFF – Solid State Drives
01-Jun-2026	Version 16	Changed	Core Options section was updated.
		Added	Read Intensive – NVMe – EDSFF – Solid State Drives Mixed Use – NVMe – EDSFF – Solid State Drives Read Intensive – NVMe – SFF – Solid State Drives Mixed Use – NVMe – SFF – Solid State Drives
04-May-2026	Version 15	Changed	Overview and Core Options sections were updated.
		Added	AMD Solarflare X4522-PLUS 10/25GbE 2-port SFP56 Adapter for HPE, HPE InfiniBand NDR/Ethernet 400Gb 1-port OSFP PCIe5 x16, MCX75310AAS-NEAT Generic Adapter, Read Intensive – NVMe – EDSFF – Solid State Drives, and Mixed Use – NVMe – EDSFF – Solid State Drives
		Removed	Read Intensive – SFF – Solid State Drives obsolete SKU.
06-Apr-2026	Version 14	Changed	Overview, Standard Features, Configuration Information and Additional Options sections were updated.
		Added	Welcoming text, SAP Solution Configuration, Registered DIMMs DDR5 (RDIMMs), Intel® Xeon 6® Processors with Performance-Cores (P-Cores), HPE InfiniBand & Ethernet, Mixed Use – NVMe – EDSFF – Solid State Drives, Mixed Use –SAS – SFF – Solid State Drives, Read Intensive – NVMe – SFF – Solid State Drives, and Full Height Full Length / Low Profile / Double Wide GPUs.
02-Mar-2026	Version 13	Changed	Service and Support and Additional Options sections were updated.
		Added	Updated GreenLake statement. Intel® Xeon 6® Processors with Performance-Cores (P-Cores) and Half Height Half Length / Single Wide Graphic Options (GPU) SKUs.
02-Feb-2026	Version 12	Changed	Standard Features, Configuration Information and Additional Options sections were updated.
		Added	Storage Controller, Cable Kit, HPE InfiniBand, Midline – 12G SAS – LFF Drives, and Midline – 6G SATA – LFF Drives SKUs.
		Removed	HPE InfiniBand obsolete SKU.
05-Jan-2026	Version 11	Changed	Additional Options section was updated.
		Added	Intel® Xeon 6® Processors with Performance-Cores (P-Cores)
		Removed	Read Intensive – NVMe – EDSFF – Solid State Drives
01-Dec-2025	Version 10	Changed	Standard Features and Additional Options sections were updated.
		Added	Intel® Xeon 6® Processors with Performance-Cores (P-Cores) matrix, Cable Kits, Read Intensive – 24G SAS – SFF – Solid State Drives, Mixed Use –SAS – SFF – Solid State Drives, and Graphic Options (GPU) SKUs.
		Removed	Read Intensive – NVMe – SFF – Solid State Drives obsolete SKU.

Summary of Changes

Date	Version History	Action	Description of Change
03-Nov-2025	Version 9	Changed	Configuration Information, Core Options, and Additional Options sections were updated.
		Added	Riser Cards and Storage Controller SKUs, Factory Configuration/NVMe Enablement Settings, Midline – 12G SAS – LFF Drives SKUs, Midline – 6G SATA – LFF Drives SKUs, Read Intensive – NVMe – SFF – Solid State Drives SKUs, and GPU Half Height Half Length / Single Wide SKU.
		Removed	OBS items: InfiniBand and Mixed Use – 12G SAS – LFF –Solid State Drives SKUs.
02-Sep-2025	Version 8	Changed	Standard Features and Additional Options sections were updated.
		Added	OCP Expansion Slots, 10 Gigabit Ethernet Adapters, HPE InfiniBand, and GPU Cooling Upgrade SKUs.
04-Aug-2025	Version 7	Changed	Additional Options and Technical Specifications sections were updated.
		Added:	Cable Kits SKUs, Acoustic Noise rules.
		Removed:	HPE Insight Cluster Management Utility sub-section.
07-Jul-2025	Version 6	Changed	Additional Options section was updated. Added: Intel® Xeon 6® Processors with Performance-Cores (P-Cores) SKUs and Boot Controller SKUs.
02-Jun-2025	Version 5	Changed	Standard Features and Additional Options sections were updated. Added: Scalable Processors SKUs, RDIMMs SKUs and SSDs SKUs.
05-May-2025	Version 4	Changed	Standard Features and Additional Options sections were updated. Added: Intelligent Provisioning URL, Factory Configuration/NVMe Enablement Settings SKUs, Software as a Service Management Enablement SKU (COM) and European Union ErP Lot 9 Regulation section to include Turkey and Ireland.
07-Apr-2025	Version 3	Changed	Core Options and Additional Options sections were updated. Added: Factory Configuration/NVMe Enablement Settings verbiage, Read Intensive – NVMe – EDSFF – Solid State Drives SKU, GPU Notes and QuickSpecs Survey.
17-Mar-2025	Version 2	Changed	Overview and Core Options sections were updated. (Added: 8LFF CTO Server Photography. Datacenter Inlet Ambient Temperature SKUs for Smart Chassis).
24-Feb-2025	Version 1	New	New QuickSpecs

[Have feedback on QuickSpecs? We're listening](#)

[Chat now](#)

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel® Corporation in the U.S. and other countries.
Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

a00073551enw - 16499 - Worldwide - V17 - 06-July-2026
HEWLETT PACKARD ENTERPRISE
HPE.com

